

AD00002-7/2



SMA (P) SMA (P)
ST L:22mm
BO/GO, PI/GO, CAP/GO

AD00002-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.02, 1.02, 0.04
■_3GHz	- 1.05, 1.05, 0.11
■_6GHz	- 1.03, 1.03, 0.18
■_8GHz	- 1.08, 1.08, 0.23
■10GHz	- 1.14, 1.14, 0.28
■12GHz	- 1.16, 1.14, 0.31
■14GHz	- 1.05, 1.05, 0.33
■16GHz	- 1.07, 1.05, 0.37
■18GHz	- 1.03, 1.01, 0.42
■MaX__	- 1.16, 1.15, 0.43

► NETWORK ANALYZER

► Test cable

► Test Adaptor

- E5071B (~8.5GHz)
■ ZVA50 (~50GHz)

- 2.4mm Male to 2.4mm Male
50GHz Cable


- AD00644-7/2 *2ea
2.92mm (J) to 2.92mm(J)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

Trc1 S11 SWR 100 mU/ Ref1 U Cal



Trc2 S22 SWR 100 mU/ Ref1 U Cal

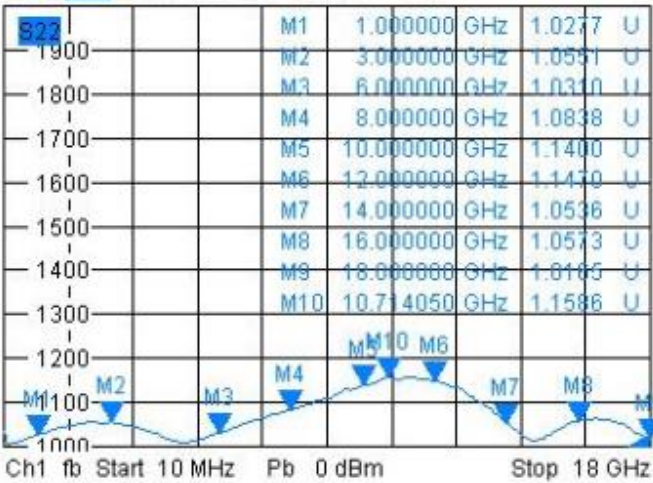

Trc3 S21 dB Mag 1 dB/ Ref0 dB Cal

