


CF00515-7/4

18GHz

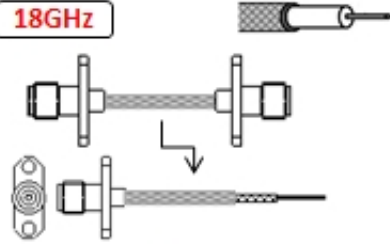

2.92mm(PTFE)-JS-2H+OPEN
+85F
2.92mm(PTFE) JS-2H 85F
BO/GO, PI/GO

CF00515-7/4 200mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

200mm

S11/S22/S21
(SWR, SWR, dB)

■_2GHz	-	1.04	1.03	0.26
■_4GHz	-	1.08	1.09	0.36
■_6GHz	-	1.11	1.11	0.46
■_8GHz	-	1.10	1.10	0.55
■10GHz	-	1.01	1.03	0.61
■12GHz	-	1.05	1.06	0.68
■14GHz	-	1.05	1.04	0.77
■16GHz	-	1.04	1.06	0.84
■18GHz	-	1.06	1.08	0.95


- ▶ NETWORK ANALYZER
- ▶ Test cable
- ▶ Test Adaptor
- ☐ E5071B (~8.5GHz)


☒ ZVA50 (~50GHz)

☒ 2.4mm Male to 2.4mm Male
50GHz Cable

☒ 2.4mm (J) to 2.92mm (P)
AD00646-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

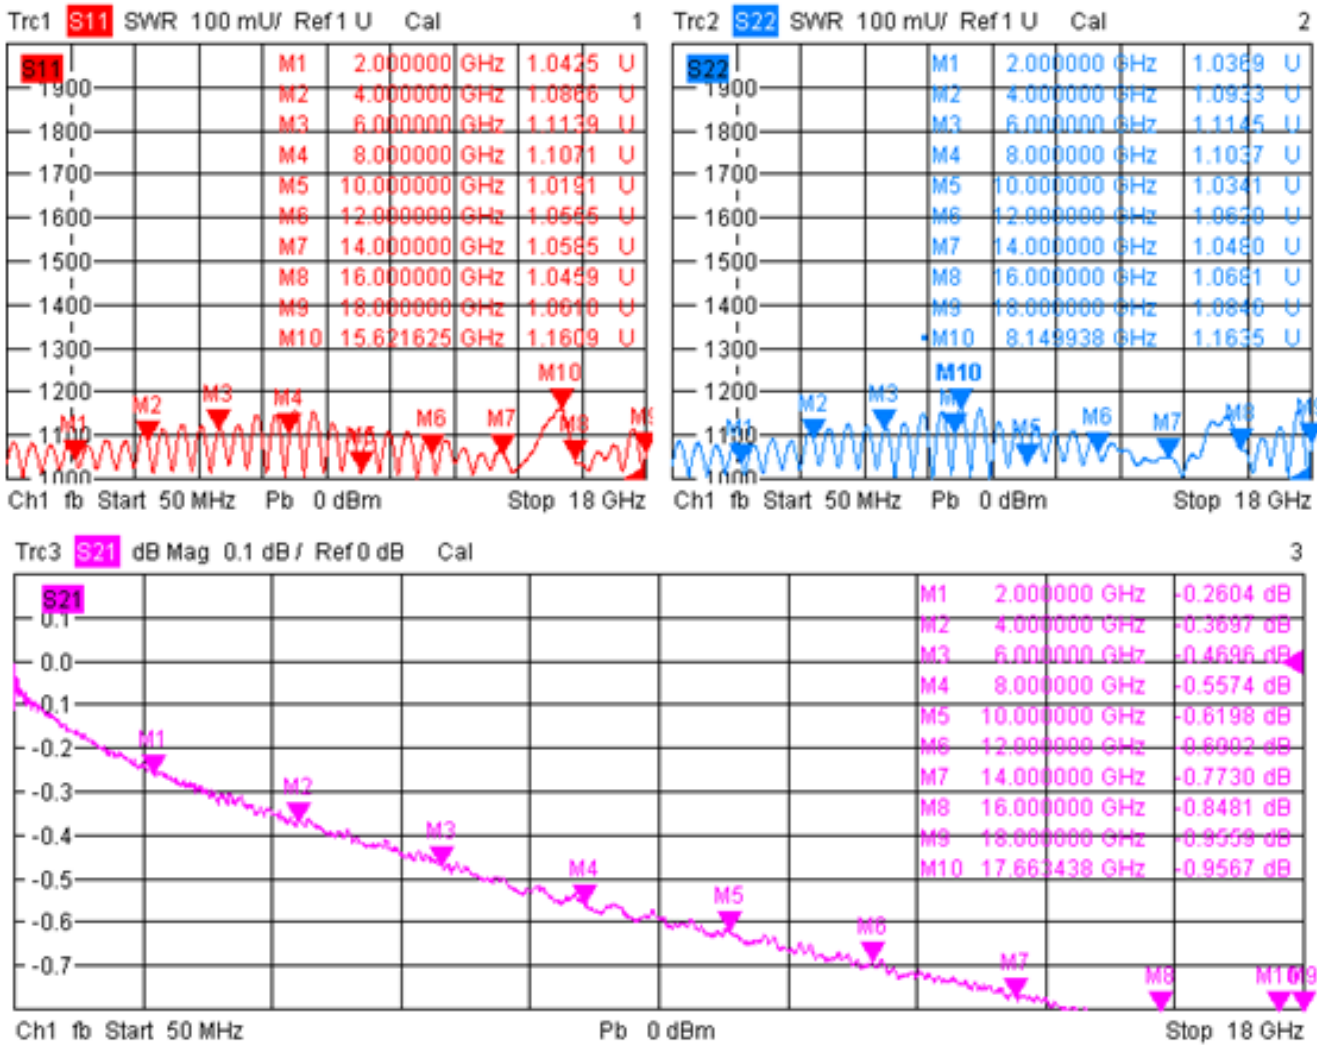

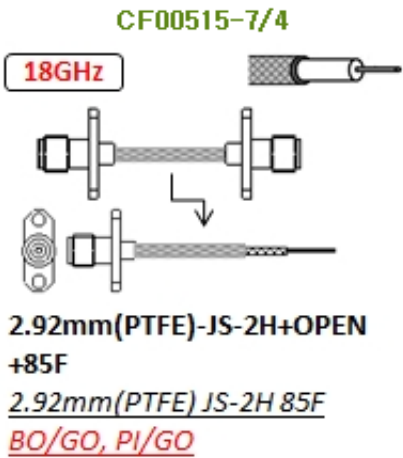

CF00515-7/4 110mm	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

110mm 측정 -> 55mm S11/S22/S21 (SWR, SWR, dB)
■_10GHz - 1.02, 1.02, 0.43
■_20GHz - 1.13, 1.11, 0.68
■_30GHz - 1.30, 1.31, 1.04

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

- E5071B (~8.5GHz)
■ ZVA50 (~50GHz)

- 2.4mm Male to 2.4mm Male
50GHz Cable

- 2.4mm (J) to 2.92mm (P)
AD00646-7/2

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

