

CF00713-7/1 60mm

MMCX-PL+SMA-JB +85FJ(CLEAR)

MMCX PL 85TP

BO/GO, PI/GO

SMA JB 85TP H8D B:11 W9.2

BO/GO, PI/GO

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

60mm S11/S22/S21 (SWR, SWR, dB)

■_1.0GHz	- 1.04, 1.08, 0.02
■_2.0GHz	- 1.05, 1.10, 0.05
■_3.0GHz	- 1.02, 1.01, 0.07
■_4.0GHz	- 1.06, 1.08, 0.08
■_5.0GHz	- 1.08, 1.12, 0.13
■_6.0GHz	- 1.10, 1.00, 0.12
■_7.0GHz	- 1.09, 1.16, 0.17

■_8.0GHz	- 1.41, 1.28, 0.26

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ MMCX (J) to SMA (J)

□ ZVA50 (~50GHz)


10GHz Cable (CF00540-7/1)

AD00368-7/1


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

CF00713


Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

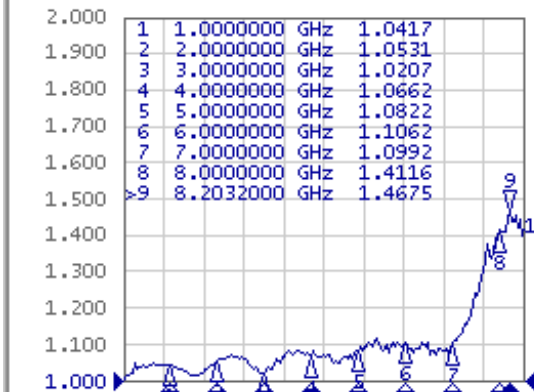

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

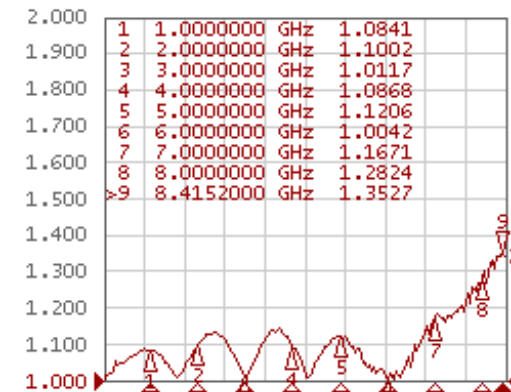

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]

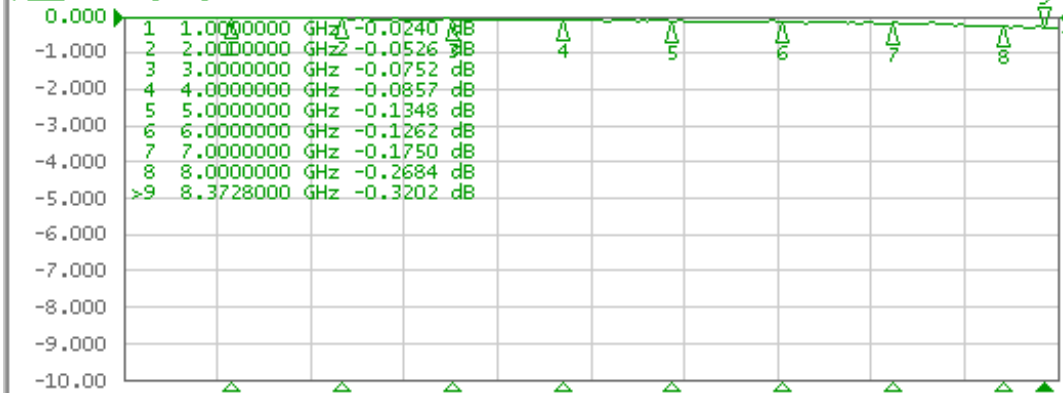

1 Start 20 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc 2021-01-27 15:00

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump

Screen Image...

Multipoint Test Set
Setup

Misc Setup

Backlight

ON

Firmware

Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)