


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM		2021.07.08.

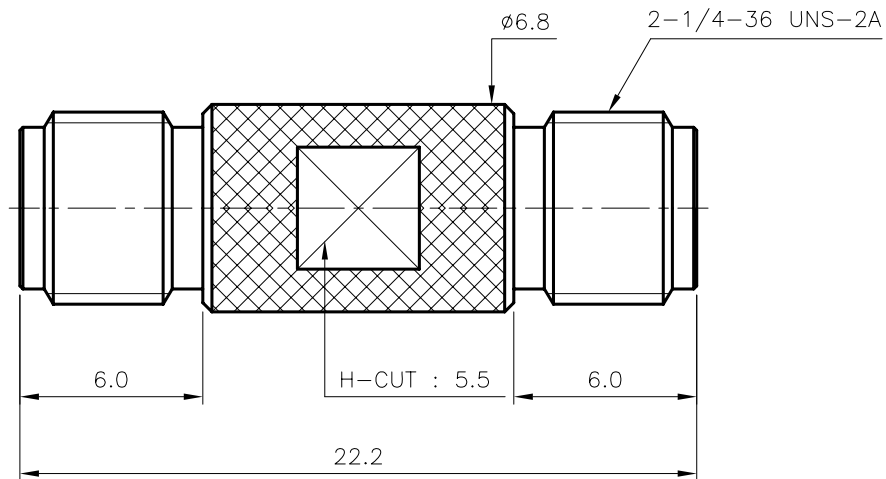

*전기적 특성

1	Frequency range	DC ~ 18GHz
2	Impedance	50ohm Nominal
3	V.S.W.R	1.2 : 1 max @18GHz
4	Insertion Loss	-0.3dB min
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA & WCDMA 3차 : -165dBc max

3	INSULATOR	2	TEFLON		DIN00090-N/1
2	CONTACT	1	BeCu C17300	Silver Plate (5 μ m)	DCT00088-5/2
1	BODY	1	MBsBD C3604BD-F	Suco Plate (3 μ m)	DBD00104-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2021. 07. 08.			 COMTECH RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	± 0.1	APPROVED BY				
	Angle					
MATERIAL	$\pm 1^\circ$	CHECKED BY			TITLE SMA50 (J) SMA50 (J) ST ADAPTOR	
		DRAWN BY I.C.KIM				
FINISH		SCALE 4/1	UNIT mm		DWG NO. AD00006-7/3	
				A4	REVISION I R	SHEET 1 of 1