

AD00009-7/1

AD00009-7/1



BNC (J) SMA (J)
ST L:22.6mm
BO/NI,PI/GO

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR,SWR,dB)

■_1.0GHz - 1.14, 1.13, 0.08
■_2.0GHz - 1.22, 1.21, 0.18
■_3.0GHz - 1.24, 1.24, 0.25

■_4.0GHz - 1.21, 1.24, 0.30
■_5.0GHz - 1.12, 1.20, 0.24
■_6.0GHz - 1.35, 1.35, 0.19
■_7.0GHz - 1.41, 1.52, 0.47
■_8.0GHz - 1.53, 1.54, 0.31

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)


■ N Male to SMA Male

■ SMA (J) BNC (P) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

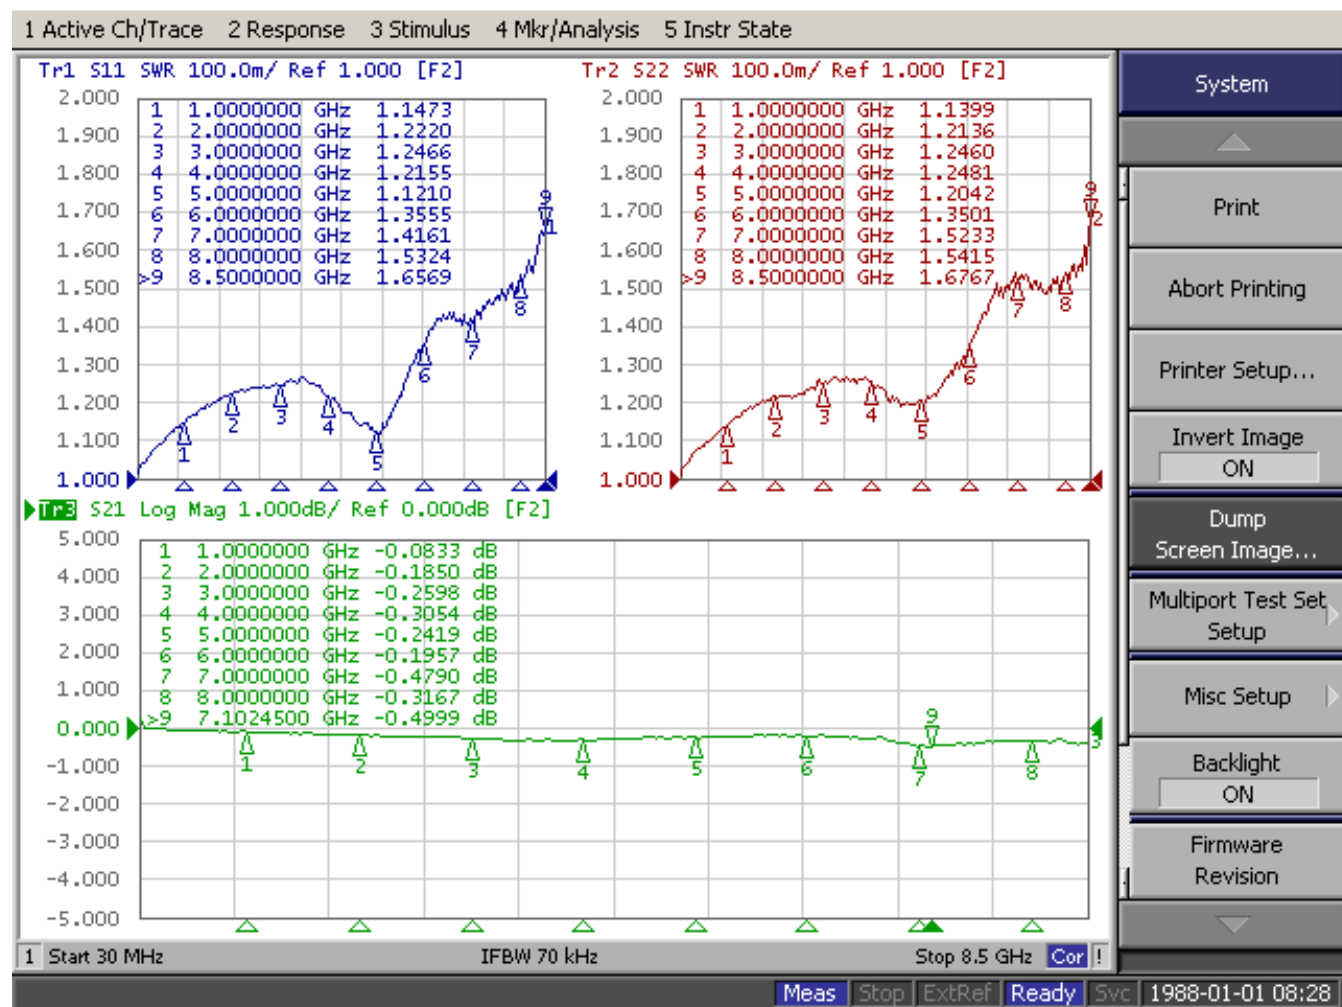

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...

Multiport Test Set
Setup

Misc Setup

Backlight

ON

Firmware
Revision