


CF01234-7/1

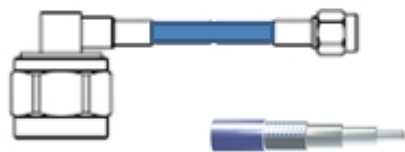

**N-PL+SMA-PS
+85MF(BLUE)**

N PL 85MF

BO/NI, PI/GO, CH/BR/NI

SMA PS 85MF

BO/GO, PI/GO, CH/BR/NI

CF01234-7/1 340mm

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

**340mm - S11/S22/S21
(SWR, SWR, dB)**

■_1.0GHz	- 1.04, 1.04, 0.26
■_2.0GHz	- 1.09, 1.09, 0.38
■_3.0GHz	- 1.09, 1.08, 0.48
■_4.0GHz	- 1.11, 1.11, 0.55

■_5.0GHz	- 1.47, 1.42, 0.76
■_6.0GHz	- 1.64, 1.56, 0.95
■_7.0GHz	- 1.23, 1.20, 0.86
■_8.0GHz	- 1.18, 1.11, 1.03

► **NETWORK ANALYZER**

► **Test cable**

► **Test Adaptor**

■ E5071B (~8.5GHz)

■ N Male to SMA Male

■ N (J) SMA (J) AD00424-7/1


□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)


■ SMA (J) SMA (J) ST
AD00006-7/2

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State


Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

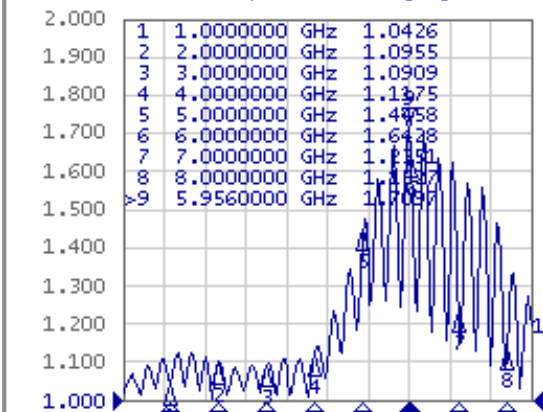

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

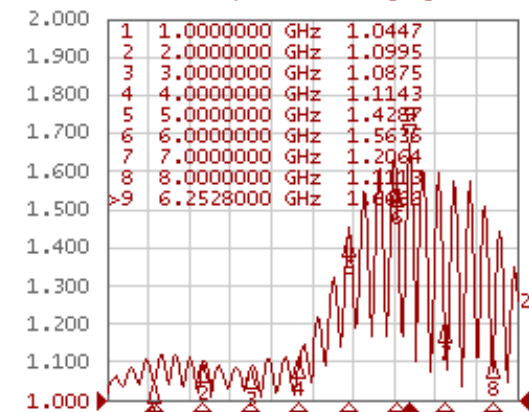

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]

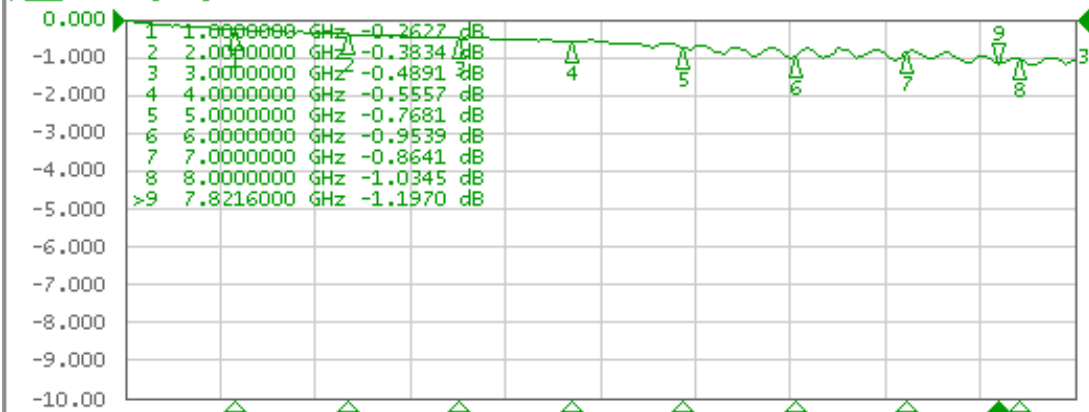

1 Start 20 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc 2020-02-03 10:52

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...

Multipoint Test Set
Setup

Misc Setup

Backlight

ON

Firmware
Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)