


AD00009-7/2



BNC (J) SMA(3.5mm) (J)
ST L:25.1mm
BODY/Nickel PIN/Gold

AD00009-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_2GHz	- 1.09, 1.09, 0.06
■_4GHz	- 1.02, 1.04, 0.09
■_6GHz	- 1.13, 1.14, 0.12
■_8GHz	- 1.07, 1.08, 0.14
■10GHz	- 1.15, 1.18, 0.17

■12GHz	- 1.27, 1.24, 0.21
■14GHz	- 1.23, 1.22, 0.24
■16GHz	- 1.21, 1.20, 0.25
■18GHz	- 1.23, 1.25, 0.28

▶ NETWORK ANALYZER


▶ Test cable

▶ Test Adaptor




□ E5071B (~8.5GHz)
■ ZVA50 (~50GHz)

■ 2.4mm Male to 2.4mm Male
50GHz Cable

■ 2.92mm (J) to 2.92mm(J)
AD00644-7/2



AD00016-7/4+AD00009-7/2
체결후에 측정함

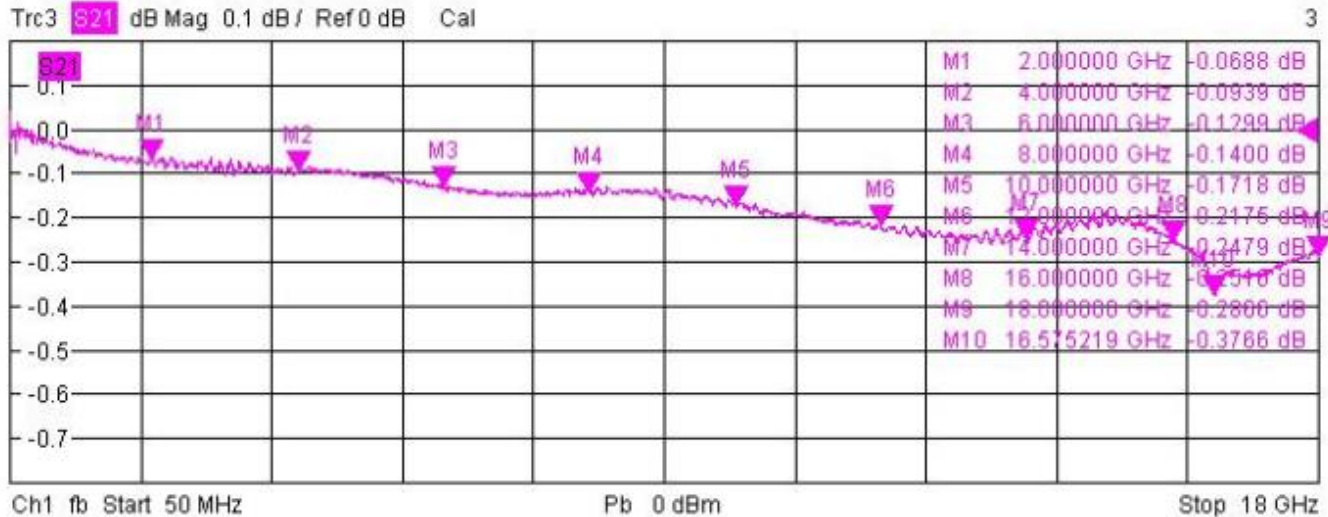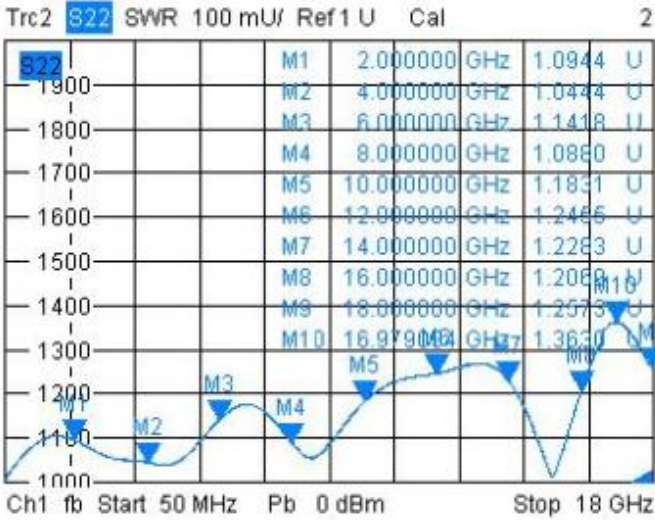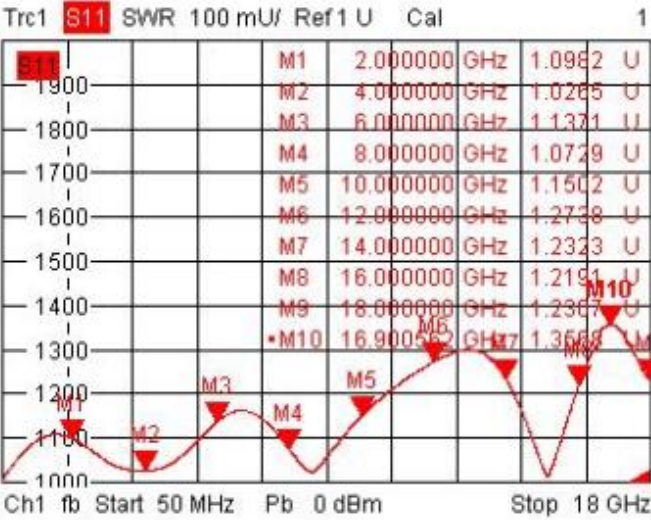

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)