

AD00011-7/1



SMA (J) SMA (P)
ST SCREW ON L:18.1mm
BO/GO, PI/GO, CAP/GO

AD00011-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.00, 1.00, 0.03
■_3GHz	- 1.02, 1.02, 0.07
■_6GHz	- 1.03, 1.02, 0.11
■_8GHz	- 1.03, 1.03, 0.14
■10GHz	- 1.05, 1.05, 0.17
■12GHz	- 1.01, 1.05, 0.19
■14GHz	- 1.07, 1.05, 0.27
■16GHz	- 1.11, 1.05, 0.33
■18GHz	- 1.02, 1.00, 0.28
■MaX___	- 1.11, 1.06, 0.33

► NETWORK ANALYZER

► Test cable

► Test Adaptor

□ E5071B (~8.5GHz)


■ 2.4mm Male to 2.4mm Male
50GHz Cable

■ AD00644-7/2
2.92mm (J) to 2.92mm(J)

■ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

Trc1 S11 SWR 100 mU/ Ref1 U Cal

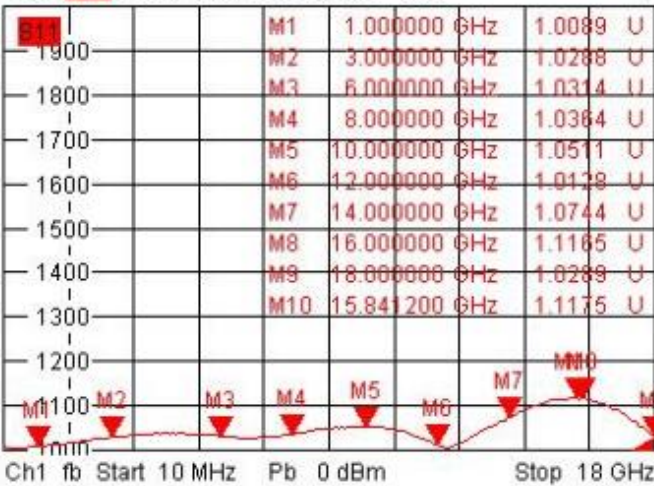

Trc2 S22 SWR 100 mU/ Ref1 U Cal



Trc3 S21 dB Mag 1 dB / Ref 0 dB Cal

