


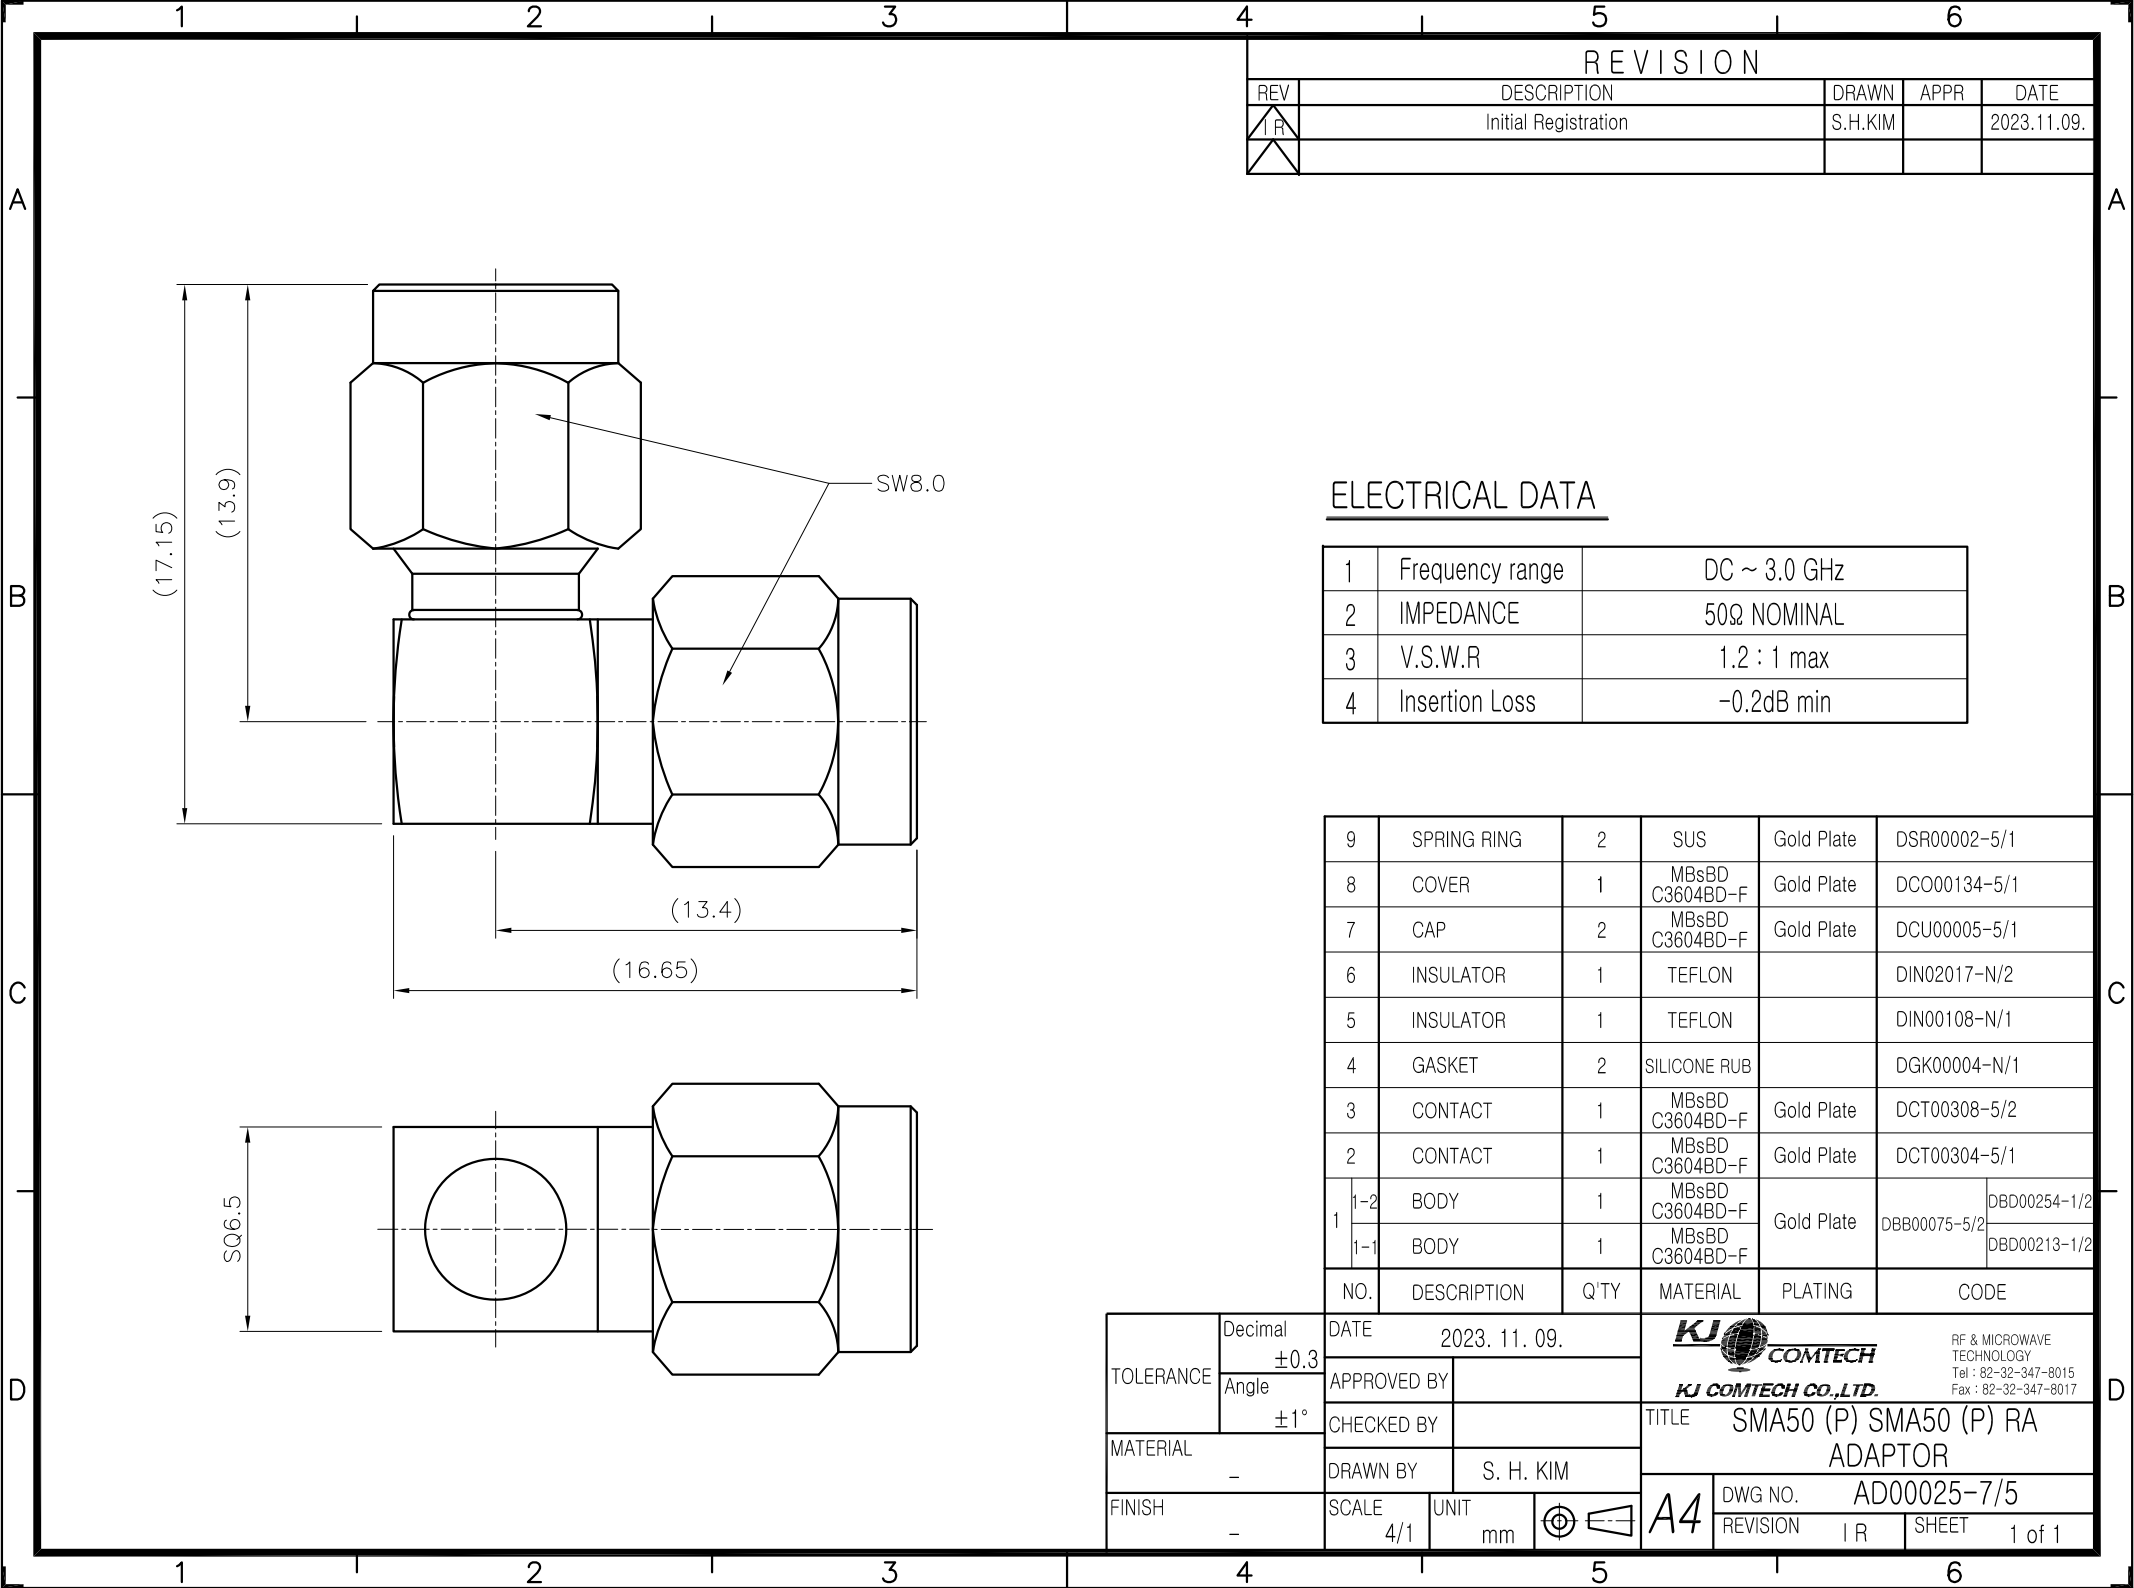

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1 R	Initial Registration	S.H.KIM		2023.11.09.

ELECTRICAL DATA

1	Frequency range	DC ~ 3.0 GHz
2	IMPEDANCE	50Ω NOMINAL
3	V.S.W.R	1.2 : 1 max
4	Insertion Loss	-0.2dB min

9	SPRING RING	2	SUS	Gold Plate	DSR00002-5/1
8	COVER	1	MBsBD C3604BD-F	Gold Plate	DCO00134-5/1
7	CAP	2	MBsBD C3604BD-F	Gold Plate	DCU00005-5/1
6	INSULATOR	1	TEFLON		DIN02017-N/2
5	INSULATOR	1	TEFLON		DIN00108-N/1
4	GASKET	2	SILICONE RUB		DGK00004-N/1
3	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00308-5/2
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DCT00304-5/1
1	1-2 BODY	1	MBsBD C3604BD-F	Gold Plate	DBD00254-1/2
	1-1 BODY	1	MBsBD C3604BD-F		DBD00213-1/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.3	DATE 2023. 11. 09.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY					
	MATERIAL -		CHECKED BY				TITLE SMA50 (P) SMA50 (P) RA ADAPTOR
FINISH -		DRAWN BY S. H. KIM					
		SCALE 4/1	UNIT mm		A4	DWG NO. AD00025-7/5	
					REVISION	I R	SHEET 1 of 1