


AD00026-7/1



SMA (J) SMA (J) RA
L:15-14.8mm
BO/GO, PI/GO

AD00026-7/1


Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.03, 1.03, 0.01
■_3GHz	- 1.04, 1.04, 0.04
■_6GHz	- 1.12, 1.12, 0.06
■_8GHz	- 1.18, 1.17, 0.08
■10GHz	- 1.10, 1.09, 0.07
■12GHz	- 1.16, 1.17, 0.10

■14GHz	- 1.34, 1.34, 0.17
■16GHz	- 1.43, 1.42, 0.22
■18GHz	- 1.69, 1.67, 0.41
■MaX_	- 1.69, 1.67, 0.41

- ▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor
- E5071B (~8.5GHz) ■ 2.4mm Male to 2.4mm Male
■ ZVA50 (~50GHz) 50GHz Cable

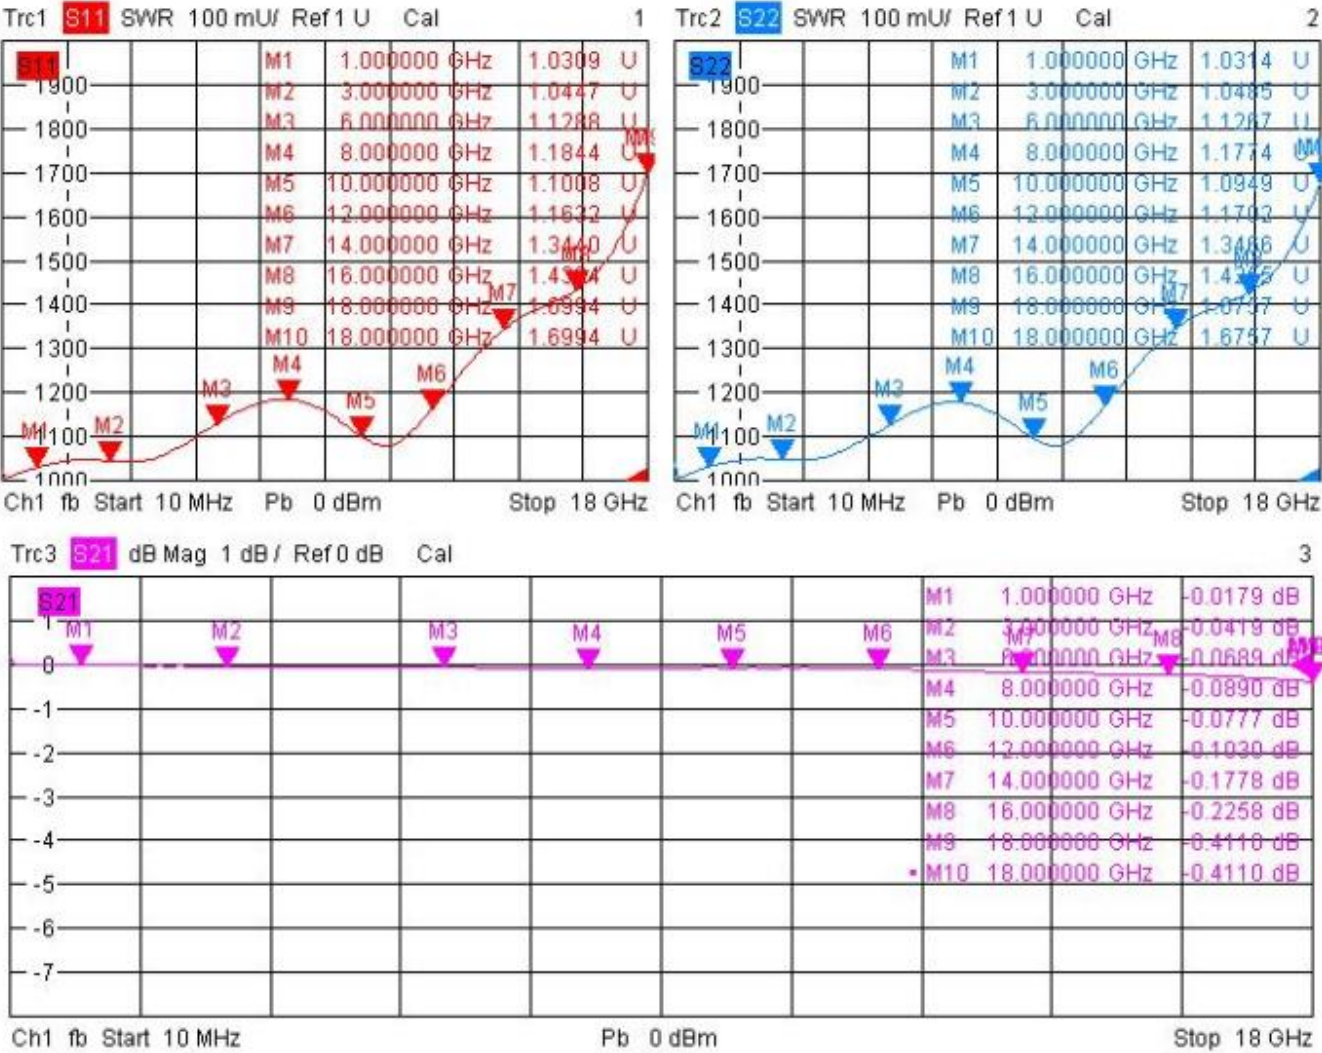

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)