


AD00480-7/1

H/CUT-5.3



SMA (J) SMA (J) BH HEX-8
L:26.6mm(6.4-2.5-17.7)

BO/GO, PI/GO

AD00480-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■_1GHz - 1.01, 1.01, 0.02
■_3GHz - 1.02, 1.02, 0.04
■_6GHz - 1.03, 1.03, 0.05
■_8GHz - 1.04, 1.04, 0.07
■10GHz - 1.07, 1.08, 0.08
■12GHz - 1.17, 1.19, 0.11
■14GHz - 1.14, 1.17, 0.13
■16GHz - 1.04, 1.02, 0.14
■18GHz - 1.17, 1.19, 0.25
■MaX___- 1.18, 1.20, 0.25

► NETWORK ANALYZER

► Test cable

► Test Adaptor

□ E5071B (~8.5GHz)


■ 2.4mm Male to 2.4mm Male

■ ZVA50 (~50GHz)

50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

Trc1 **S11** SWR 100 mU/ Ref1 U Cal

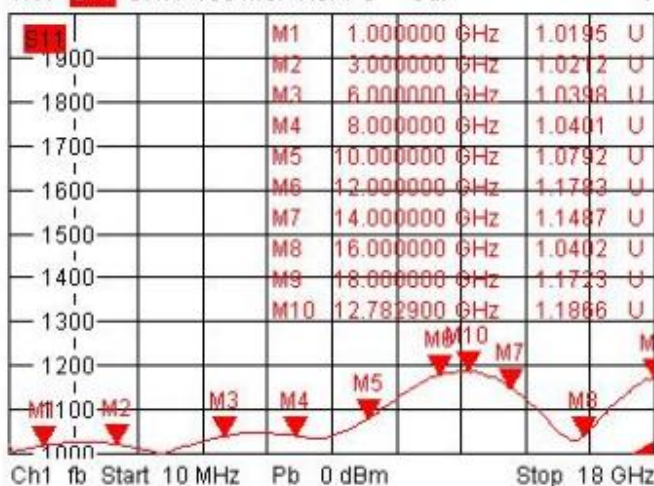

Trc3 **S21** dB Mag 1 dB / Ref0 dB Cal

