


AD00029-7/2

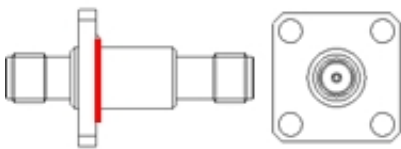

SMA (J) SMA (J) 4 HOLE
□17.5-12.7-3.2
L:32mm(9.4-2.3-20.3)
BO/GO, PI/GO

AD00029-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR,SWR,dB)

■_1GHz	-	1.02	1.02	0.02
■_3GHz	-	1.01	1.01	0.05
■_6GHz	-	1.04	1.04	0.06
■_8GHz	-	1.06	1.06	0.07
■10GHz	-	1.16	1.17	0.09
■12GHz	-	1.06	1.08	0.07
■14GHz	-	1.15	1.15	0.10
■16GHz	-	1.16	1.15	0.11
■18GHz	-	1.08	1.08	0.10
■MaX_	-	1.20	1.19	0.13

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)
- ☒ 2.4mm Male to 2.4mm Male
- 50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

