


AD00511-7/3

AD00511-7/3

무전해 NICKEL

D/CUT-5.9



SMA (J) SMA (J)
BH HEX-9.5
L:22.2mm(5.8-1.7-14.7)
BO/EN/NI, PI/GO

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.00, 1.00, 0.01
■_3GHz	- 1.02, 1.02, 0.03
■_6GHz	- 1.09, 1.09, 0.05
■_8GHz	- 1.11, 1.11, 0.06
■10GHz	- 1.09, 1.09, 0.08
■12GHz	- 1.08, 1.09, 0.09
■14GHz	- 1.12, 1.11, 0.09
■16GHz	- 1.11, 1.10, 0.09
■18GHz	- 1.07, 1.06, 0.10
■MaX__	- 1.12, 1.12, 0.10

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

□ E5071B (~8.5GHz)


■ 2.4mm Male to 2.4mm Male

■ ZVA50 (~50GHz)


50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

Trc1 S11 SWR 100 mU/ Ref1 U Cal

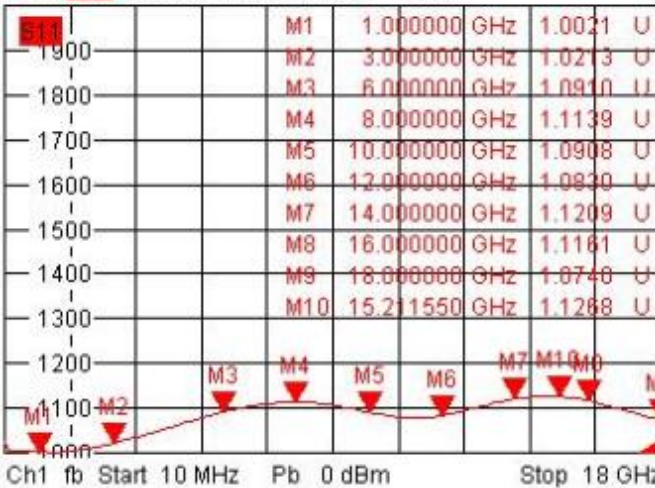

Trc2 S22 SWR 100 mU/ Ref1 U Cal

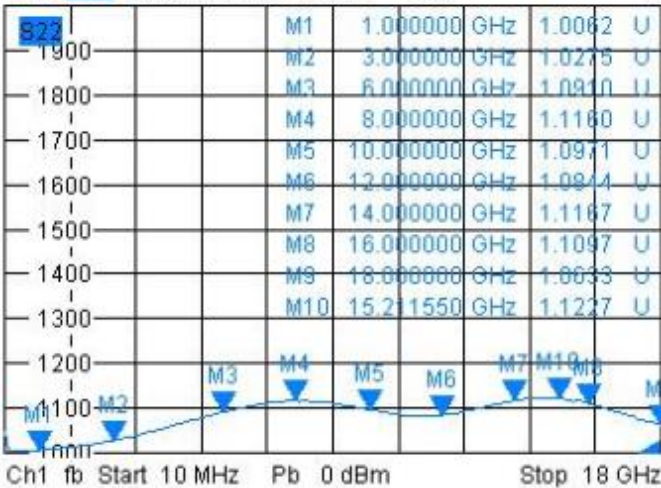

Trc3 S21 dB Mag 1 dB / Ref0 dB Cal

