


AD00029-7/3

AD00029-7/3

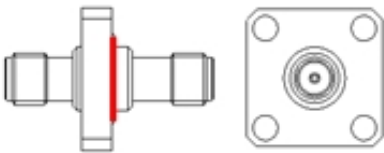

SMA (J) SMA (J) 4 HOLE
□17.5-12.7-3.2
L:25.7mm(9.4-3.8-12.5)
BO/GO, PI/GO

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.01, 1.01, 0.01
■_3GHz	- 1.00, 1.00, 0.03
■_6GHz	- 1.05, 1.05, 0.05
■_8GHz	- 1.05, 1.05, 0.05
■10GHz	- 1.02, 1.01, 0.05
■12GHz	- 1.13, 1.13, 0.07
■14GHz	- 1.19, 1.19, 0.10
■16GHz	- 1.11, 1.11, 0.09
■18GHz	- 1.03, 1.03, 0.08
■MaX__	- 1.19, 1.19, 0.11

- ▶ NETWORK ANALYZER
- ▶ Test cable
- ▶ Test Adaptor
- E5071B (~8.5GHz)

■ 2.4mm Male to 2.4mm Male

■ ZVA50 (~50GHz)

50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

