


AD00030-7/2

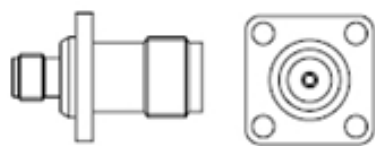

SMA (J) TNC (J) 4 HOLE

□17.5-12.7-3

L:26mm(8.7-2.3-15)

BO/NI,PI/GO

AD00030-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.03, 1.03, 0.06
■_2.0GHz	- 1.11, 1.11, 0.06
■_3.0GHz	- 1.03, 1.04, 0.07
■_4.0GHz	- 1.14, 1.14, 0.04
■_5.0GHz	- 1.13, 1.15, 0.00

■_6.0GHz	- 1.51, 1.53, 0.23
■_7.0GHz	- 1.38, 1.42, 0.18
■_8.0GHz	- 1.44, 1.46, 0.22

▶ NETWORK ANALYZER ▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

