


AD00590-7/4

PIMD

이원합금

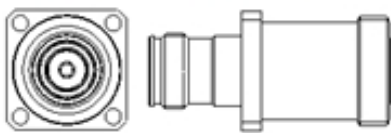

4.3/10 DIN (J)

7/16 DIN (J)

4 HOLE □32-24.8-4.2

L:63.9mm(35-5-25)

BO/NI/TIN, PI/SI

AD00590-7/4

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.02, 1.03, 0.04
■_2.0GHz	- 1.06, 1.06, 0.06
■_3.0GHz	- 1.10, 1.11, 0.08
■_4.0GHz	- 1.19, 1.20, 0.11
■_5.0GHz	- 1.12, 1.12, 0.12
■_6.0GHz	- 1.19, 1.18, 0.19
■_7.0GHz	- 1.14, 1.12, 0.15
■_8.0GHz	- 1.18, 1.22, 0.15
MaX 8.5G	- 1.31, 1.35, 0.24

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

■ 4.3/10 (P) N (J) 구매품 1EA

□ ZVA50 (~50GHz)


10GHz Cable (CF00539-7/1)

■ 7/16 (P) N (J) AD00377-7/4


1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

AD00590-4


Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

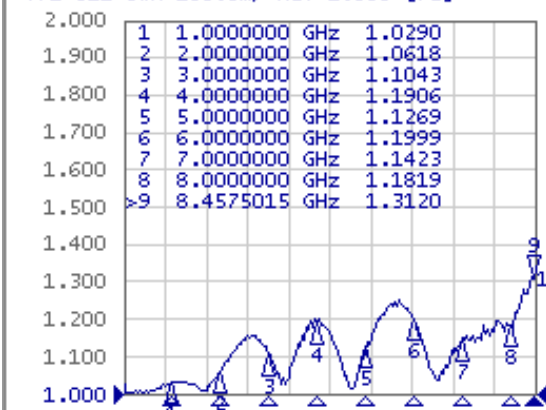

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

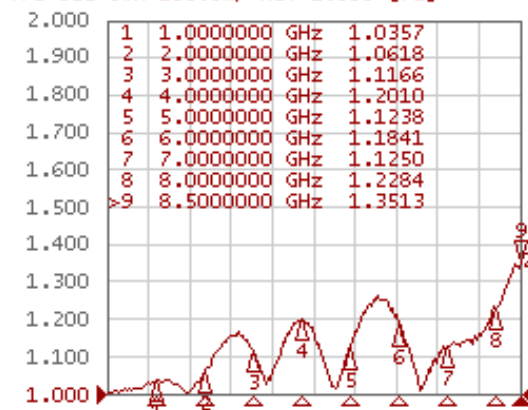

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]

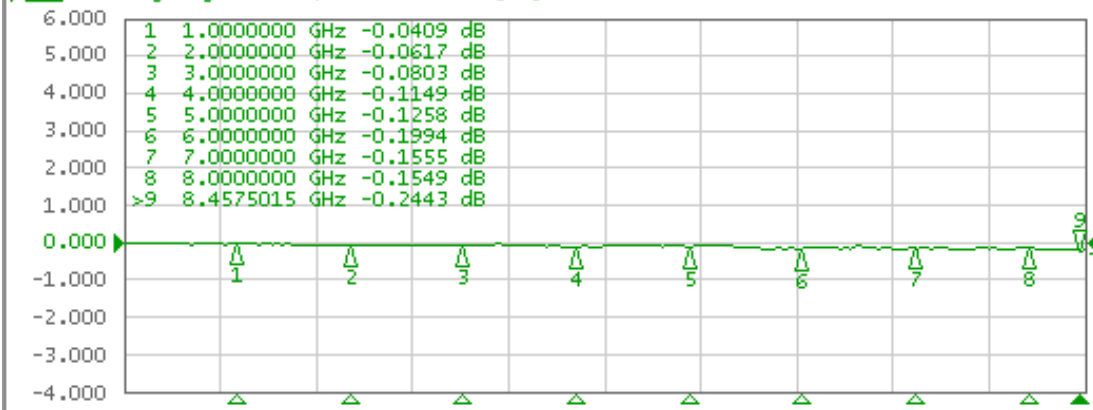

1 Start 300 kHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc 2019-11-06 16:18

Display

Allocate Channels

Num of Traces
3

Allocate Traces

Display Data

Data -> Mem

Data Math
OFF

Equation Editor...

Equation
OFF

Edit Title Label

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)