


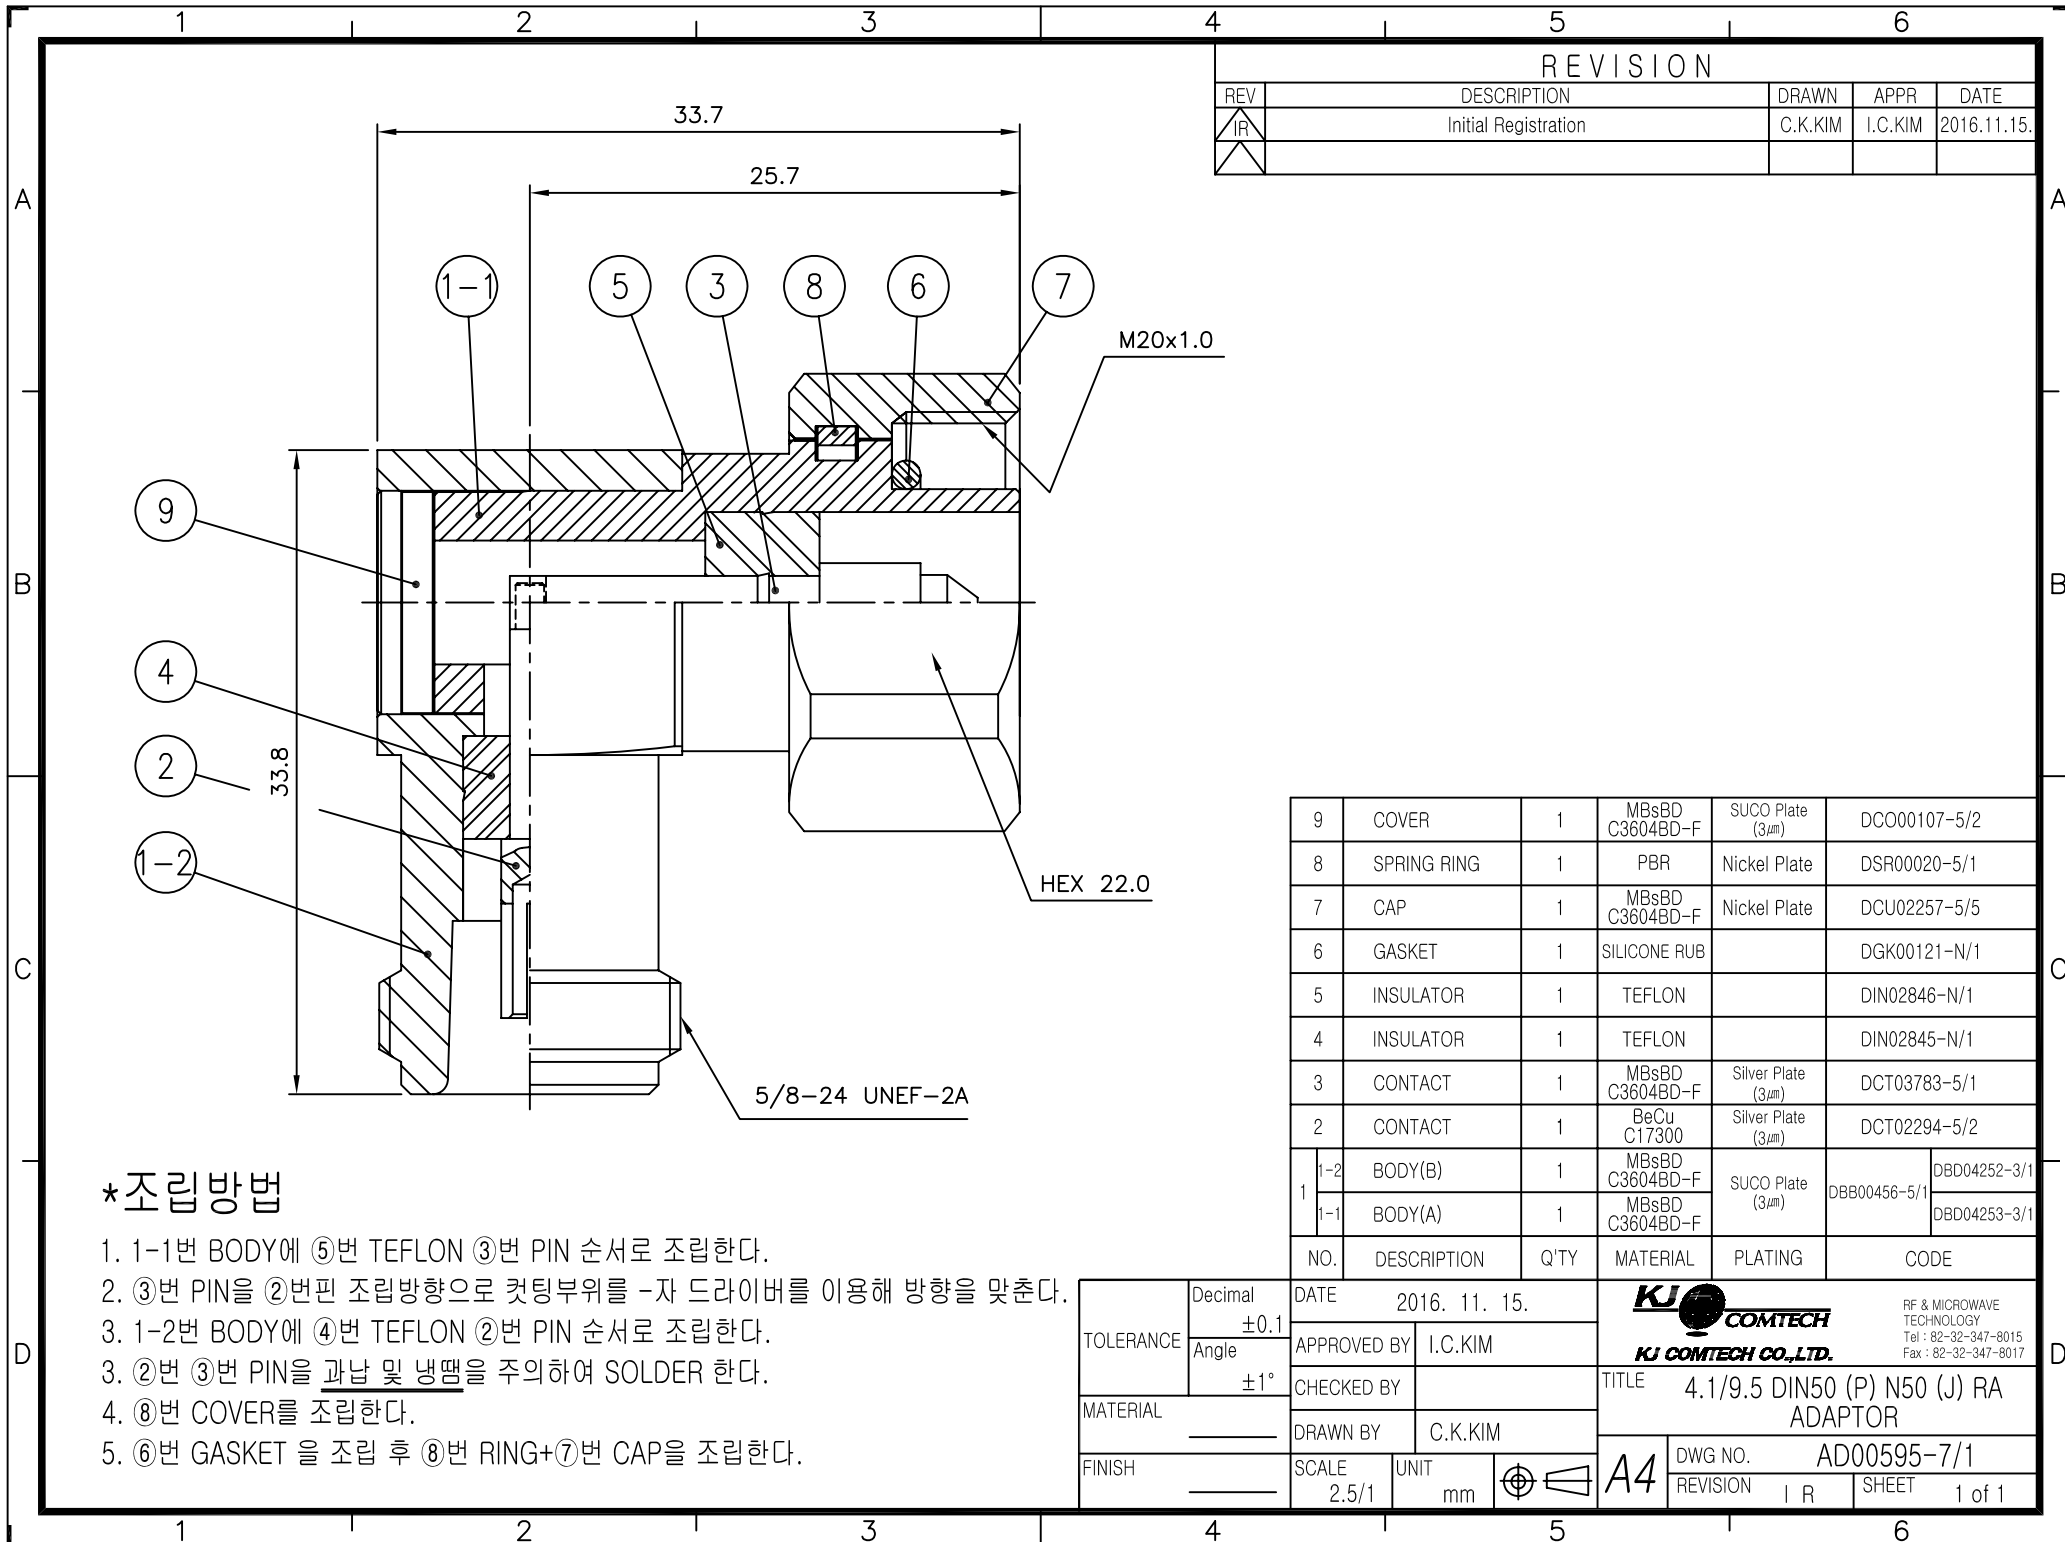

| REVISION |                      |         |         |             |
|----------|----------------------|---------|---------|-------------|
| REV      | DESCRIPTION          | DRAWN   | APPR    | DATE        |
| IR       | Initial Registration | C.K.KIM | I.C.KIM | 2016.11.15. |

|     |             |      |                    |                       |              |
|-----|-------------|------|--------------------|-----------------------|--------------|
| 9   | COVER       | 1    | MBsBD<br>C3604BD-F | SUCO Plate<br>(3μm)   | DCO00107-5/2 |
| 8   | SPRING RING | 1    | PBR                | Nickel Plate          | DSR00020-5/1 |
| 7   | CAP         | 1    | MBsBD<br>C3604BD-F | Nickel Plate          | DCU02257-5/5 |
| 6   | GASKET      | 1    | SILICONE RUB       |                       | DGK00121-N/1 |
| 5   | INSULATOR   | 1    | TEFLON             |                       | DIN02846-N/1 |
| 4   | INSULATOR   | 1    | TEFLON             |                       | DIN02845-N/1 |
| 3   | CONTACT     | 1    | MBsBD<br>C3604BD-F | Silver Plate<br>(3μm) | DCT03783-5/1 |
| 2   | CONTACT     | 1    | BeCu<br>C17300     | Silver Plate<br>(3μm) | DCT02294-5/2 |
| 1   | 1-2 BODY(B) | 1    | MBsBD<br>C3604BD-F | SUCO Plate<br>(3μm)   | DBB00456-5/1 |
|     | 1-1 BODY(A) | 1    | MBsBD<br>C3604BD-F |                       | DBD04252-3/1 |
| NO. | DESCRIPTION | Q'TY | MATERIAL           | PLATING               | CODE         |

### \*조립방법

1. 1-1번 BODY에 ⑤번 TEFLON ③번 PIN 순서로 조립한다.
2. ③번 PIN을 ②번핀 조립방향으로 커팅부위를 -자 드라이버를 이용해 방향을 맞춘다.
3. 1-2번 BODY에 ④번 TEFLON ②번 PIN 순서로 조립한다.
3. ②번 ③번 PIN을 과납 및 냉맴을 주의하여 SOLDER 한다.
4. ⑧번 COVER를 조립한다.
5. ⑥번 GASKET 을 조립 후 ⑧번 RING+⑦번 CAP을 조립한다.

|           |         |      |                    |         |                                                                               |
|-----------|---------|------|--------------------|---------|-------------------------------------------------------------------------------|
| TOLERANCE | Decimal | ±0.1 | DATE 2016. 11. 15. |         | <br>RF & MICROWAVE TECHNOLOGY<br>Tel : 82-32-347-8015<br>Fax : 82-32-347-8017 |
|           | Angle   | ±1°  | APPROVED BY        | I.C.KIM |                                                                               |
| MATERIAL  |         |      | CHECKED BY         |         | TITLE 4.1/9.5 DIN50 (P) N50 (J) RA ADAPTOR                                    |
|           |         |      | DRAWN BY           | C.K.KIM |                                                                               |
| FINISH    |         |      | SCALE              | 2.5/1   | DWG NO. AD00595-7/1<br>REVISION I R SHEET 1 of 1                              |
|           |         |      | UNIT               | mm      |                                                                               |