


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	G.Y.KIM	I.C.KIM	2016.11.17.

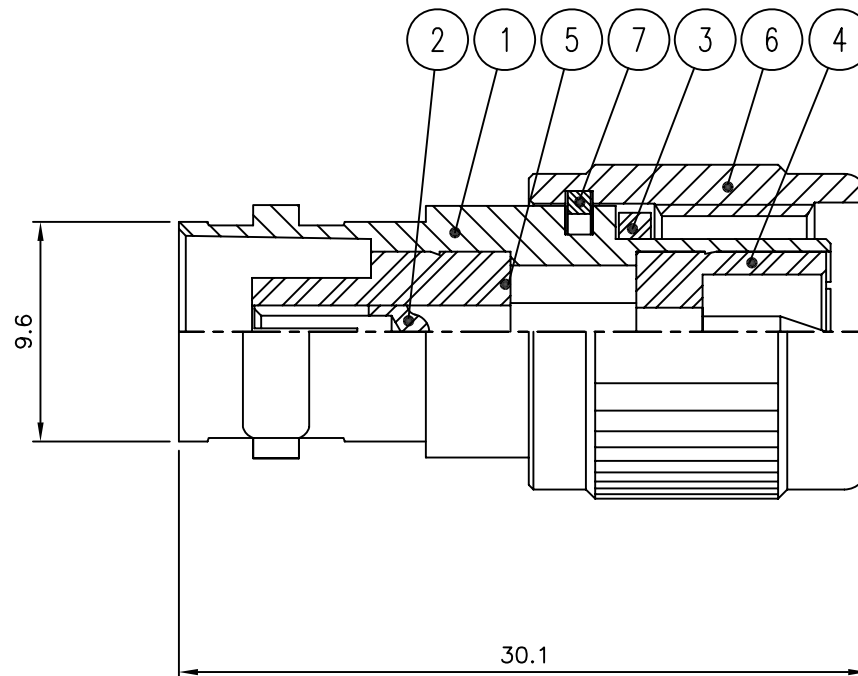

* ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~3GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS (Max) : 0.2dB

7	SPRING RING	1	MBsBD C3604BD-F	Nickel Plate	DSR00048-5/1
6	CAP	1	MBsBD C3604BD-F	Nickel Plate	DCU00018-5/1
5	INSULATOR	1	TEFLON		DIN02847-N/1
4	INSULATOR	1	TEFLON		DIN02848-N/1
3	GASKET	1	SILICONE RUB		DGK00008-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DCT00455-5/2
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00046-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ± 0.1	DATE 2016. 11. 17.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle $\pm 1^\circ$	APPROVED BY	I.C.KIM	
MATERIAL		CHECKED BY	C.K.KIM	TITLE BNC50 (J) TNC50 (P) ADAPTOR
		DRAWN BY	G.Y.KIM	
FINISH		SCALE	3/1	 A4 DWG NO. AD00063-7/2 REVISION I R SHEET 1 of 1
		UNIT	mm	