


* CABLE LOT별 지름 치수 확인 후 작업할 것.

REVISION				
No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2019. 01. 30.

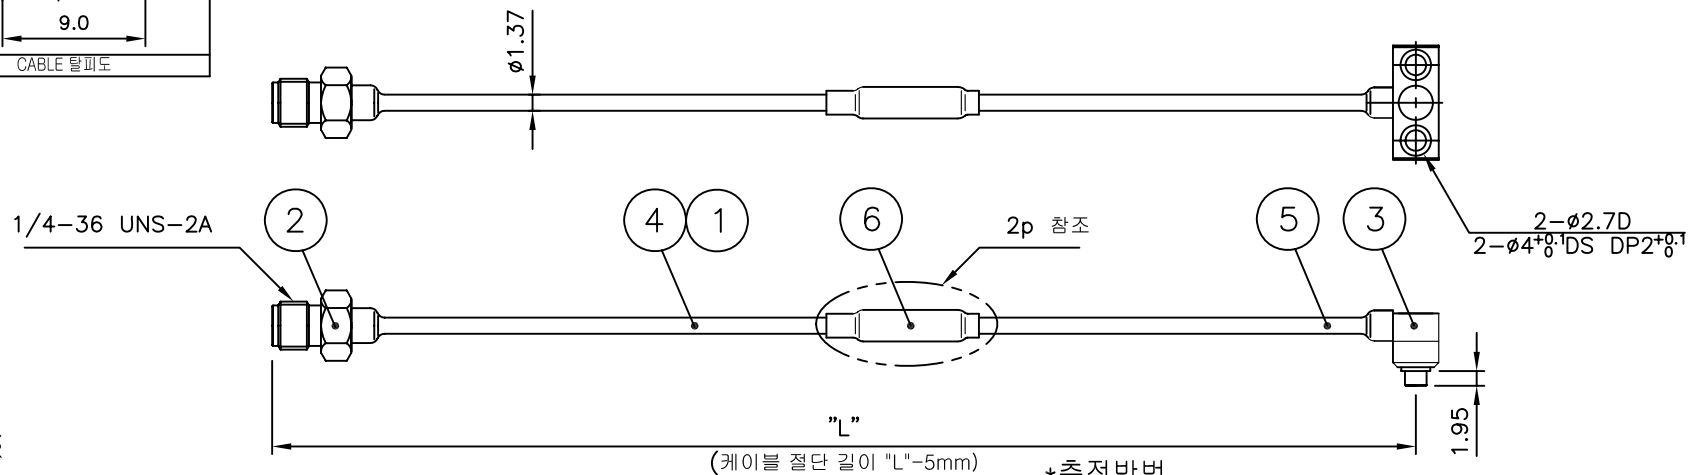

※중요※

1. 절단 길이 동일하게 작업 필요
2. 주파수대역 DC ~ 2.6GHz

MARKER(MHz)	Insertion Loss(S21) ※Loss 편차 ±0.05 이내
700	-0.21±0.05
800	-0.25±0.05
900	-0.25±0.05
1400	-0.34±0.05
1700	-0.39±0.05
2300	-0.49±0.05
2500	-0.51±0.05
2600	-0.50±0.05

*측정방법

1. SMA E cal을 사용하여 Cal 할 것.
 2. Test Cable
- Port 1 - SMA Conn 체결
Port 2 - KMS-560 Adaptor(AD00558-7/1) 체결 후 측정

6	SHRINK TUBE	1	LS TUBE	ATU00251-N/1	ø4 - YELLOW
5	BONDING TUBE	1	LS TUBE	ATU00003-N/1	ø3 BLACK 70mm
4	BONDING TUBE	1	LS TUBE	ATU00003-N/1	ø3 BLACK 80mm
3	CONNECTOR	1	KJ COMTECH	CN03416-7/2	KMS-560-JL 2H
2	CONNECTOR	1	KJ COMTECH	CN02411-7/3	SMA50-JS
1	COAXIAL CABLE		유신전자	ACA00468-N/1	RF-ø1.37 (케이블절단길이 : "L"-5mm)

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMA50 JS----▶▶ BODY : Gold Plating
CONTACT : Gold Plating
 - 2-2. KMS560 JL-2H----▶▶ BODY : Nickel Plating
CONTACT : Gold Plating

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS	
	DATE 2019. 01. 30.			KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
CUSTOMER CODE	APPROVED BY	I.C.KIM					
CABLE LENGTH TOLERANCE 0 ~ 1000mm : +5, -0 1000 ~ 2000mm : +10, -0 2000 ~ 3000mm : +15, -0 3000 ~ 4000mm : +20, -0 4000 ~ 5000mm : +25, -0 5000 ~ : +10%	CHECKED BY			TITLE CABLE ASS'Y			
	DRAWN BY	S.Y.EUN					
	CHECKED BY			A4	DWG NO.	CF01323-7/1	
	SCALE N/S	UNIT mm			DETAIL NO.		
				REVISION	I R	SHEET 1 of 1	

※ 작업 형상

*품번 4를 먼저 수축한 뒤에 그위로 품번5를 겹치도록 수축한다.
겹친부분을 품번6 으로 덮으면서 수축 한다.

