


CF01447-7/1

~18GHz

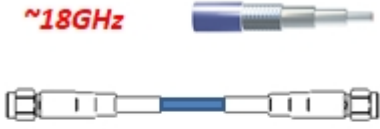

SMA-PS+SMA-PS
+85MF(BLUE)
SMA PS 85FJ Solder+SCREW
■18Ghz
BO/Ni PI/Go CAP/SUS

CF01447-7/1 0.3M	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

0.3M - S11/S22/S21 (SWR, SWR, dB)	
■_2GHz	- 1.05, 1.05, 0.29
■_4GHz	- 1.03, 1.04, 0.42
■_6GHz	- 1.11, 1.12, 0.52
■_8GHz	- 1.00, 1.02, 0.61
■10GHz	- 1.08, 1.08, 0.69
■12GHz	- 1.08, 1.08, 0.78
■14GHz	- 1.05, 1.03, 0.85
■16GHz	- 1.05, 1.01, 0.90
■18GHz	- 1.00, 1.01, 0.97

▶ NETWORK ANALYZER


- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)

▶ Test cable

- ☐ N Male to SMA Male
10GHz Cable (CF00540-7/1)
- ☐ N Male to N Male
10GHz Cable (CF00539-7/1)
- ☒ 2.4mm Female to 2.4mm Male
50GHz Cable (CF01252-7/1)

▶ Test Adaptor

- ☒ 2.4mm Female to 2.92mm Male
(KJ Code : AD00646-7/2_ / 2ea)
- ☒ 2.92mm Female to 2.92mm Female
(KJ Code : AD00644-7/2_ / 2ea)

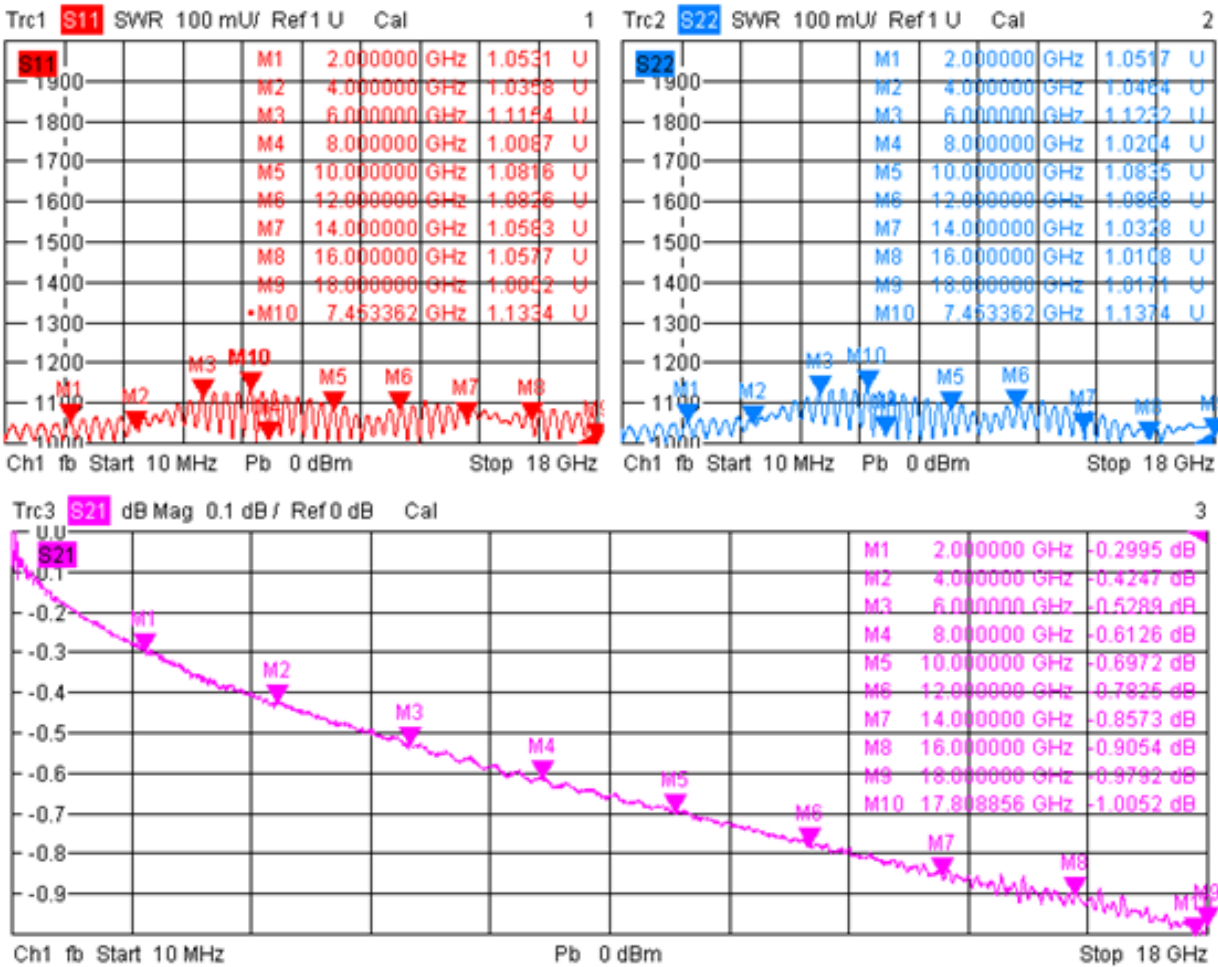

11/12/2019, 6:12 PM

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)