

AD00092-7/1



TNC (J) TNC (J) 4 HOLE
□17.5-12.7-3.1
L:32.6mm(12.7-2.4-17.5)
BO/NI,PI/GO

AD00092-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR,SWR,dB)

■_1.0GHz	- 1.05, 1.05, 0.11
■_2.0GHz	- 1.01, 1.00, 0.10
■_3.0GHz	- 1.05, 1.04, 0.13
■_4.0GHz	- 1.63, 1.60, 0.42
■_5.0GHz	- 1.39, 1.15, 0.71
■_6.0GHz	- 1.13, 1.15, 0.07
■_7.0GHz	- 1.18, 1.18, 0.11
■_8.0GHz	- 1.35, 1.32, 0.18

► NETWORK ANALYZER

► Test cable

► Test Adaptor


■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)


TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

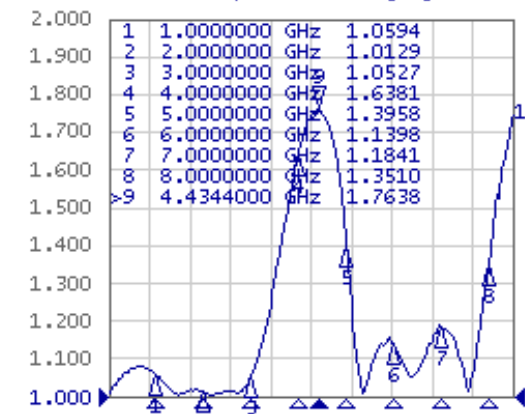

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

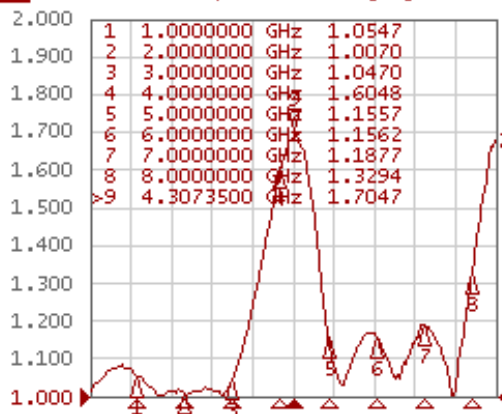

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 30 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc 2020-04-17 16:15

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...

Multipoint Test Set
Setup

Misc Setup

Backlight

ON

Firmware

Revision