


REVISION	
REV	DATE
1	2008. 2. 22.
Description 부속 1 (제치기 No. 200802-0007) (BODY 부속) INSULATOR 치수 변경, 조립주기 추가	

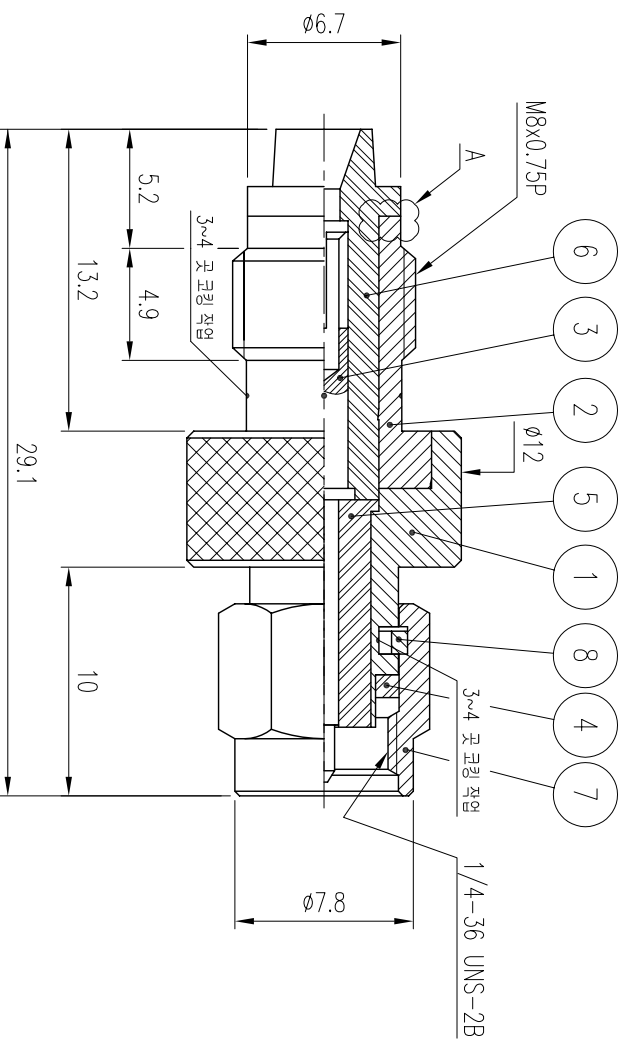

주거

※ 조립순서 - 1. BODY (2) 와 INSULATOR (6) 을 조립하며 조립후 A부 면이

2. BODY (1) 과 INSULATOR (5)를 조립한다.
3. 조립된 (6) INSULATOR 에 CONTACT (3) 을 밀어 넣는다.
(CONTACT의 외경단이 INSULATOR에 완전히 들어기도록 조립)
4. 조립된 (2) BODY 와 BODY (1) 을 서로 역끼움 한다.
5. 도면상에 위치 양단에 코킹 작업을 한다.
6. SMA CAP을 조립한다.

1	8	SPRING RING	1	Stainless steel	Passivated	DSR000002-5/1 (R2001)
	7	Coupling CAP	1	BRASS	Nickel Plated	DCU000005-5/2 (R2011)
	6	INSULATOR	1	PtFE		DA000064-N/1 DA000061-N/1
	5	INSULATOR	1	PtFE		D4000060-N/1
	4	GASKET	1	SILICONE RUB		DCR000004-N/1 (G2001)
1	3	CONTACT	1	Beryllium copper	Gold Plated	DAC00100-5/1
	2	BODY (B)	1	BRASS	Nickel Plated	DAD00101-5/1 DA000005-5/1
	1	BODY (A)	1	BRASS	Nickel Plated	DAD000096-5/1
CUSTOMER	NO.	DESCRIPTION	QTY	MATERIAL	PLATING	REMARKS
	DATE		2008. 1. 30.			
	APPROVED BY					
CUSTOMER CODE	CHECKED BY					
	DRAWN BY					
TOLERANCES	SCALE	UNIT	WEIGHT			
	3/1	mm	—			
		A4				
		OLD CODE.				
		DWG. NO.		AD000201-7/2		
		TITLE		FME FEMALE / SMA MALE ADAPTOR		
		VER.1				
		KJ COMTECH CO.,LTD.		 RF & MICROWAVE TECHNOLOGY Tel : 85-20-547-8015 Fax : 85-20-547-8017		