


AD00093-7/2

AD00093-7/2

S11/S22/S21(SWR, SWR, dB)

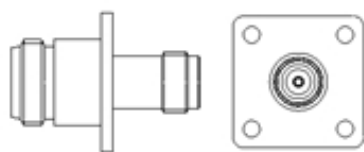

N (J) TNC (J) 4 HOLE
□25.4-18.2-3.2
L:35mm(16.7-2.3-16)
BO/NI,PI/GO

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

■_1.0GHz	- 1.04, 1.03, 0.24
■_2.0GHz	- 1.02, 1.02, 0.23
■_3.0GHz	- 1.07, 1.08, 0.24

■_4.0GHz	- 1.32, 1.33, 0.30
■_5.0GHz	- 1.31, 1.36, 0.33
■_6.0GHz	- 1.15, 1.19, 0.40
■_7.0GHz	- 1.04, 1.02, 0.12
■_8.0GHz	- 1.27, 1.25, 0.13

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

