


AD00511-7/1

D/CUT-5.9



SMA (J) SMA (J) BH
HEX-9.5
L:22.2mm(5.8-1.7-14.7)
BO/NI, PI/GO

AD00511-7/1


Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.00, 1.00, 0.01
■_3GHz	- 1.02, 1.01, 0.04
■_6GHz	- 1.06, 1.06, 0.06
■_8GHz	- 1.07, 1.07, 0.06
■10GHz	- 1.03, 1.03, 0.06
■12GHz	- 1.06, 1.05, 0.07
■14GHz	- 1.11, 1.11, 0.08
■16GHz	- 1.11, 1.11, 0.08
■18GHz	- 1.06, 1.07, 0.09
■MaX_	- 1.12, 1.12, 0.09

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- E5071B (~8.5GHz) ■ 2.4mm Male to 2.4mm Male
■ ZVA50 (~50GHz) 50GHz Cable

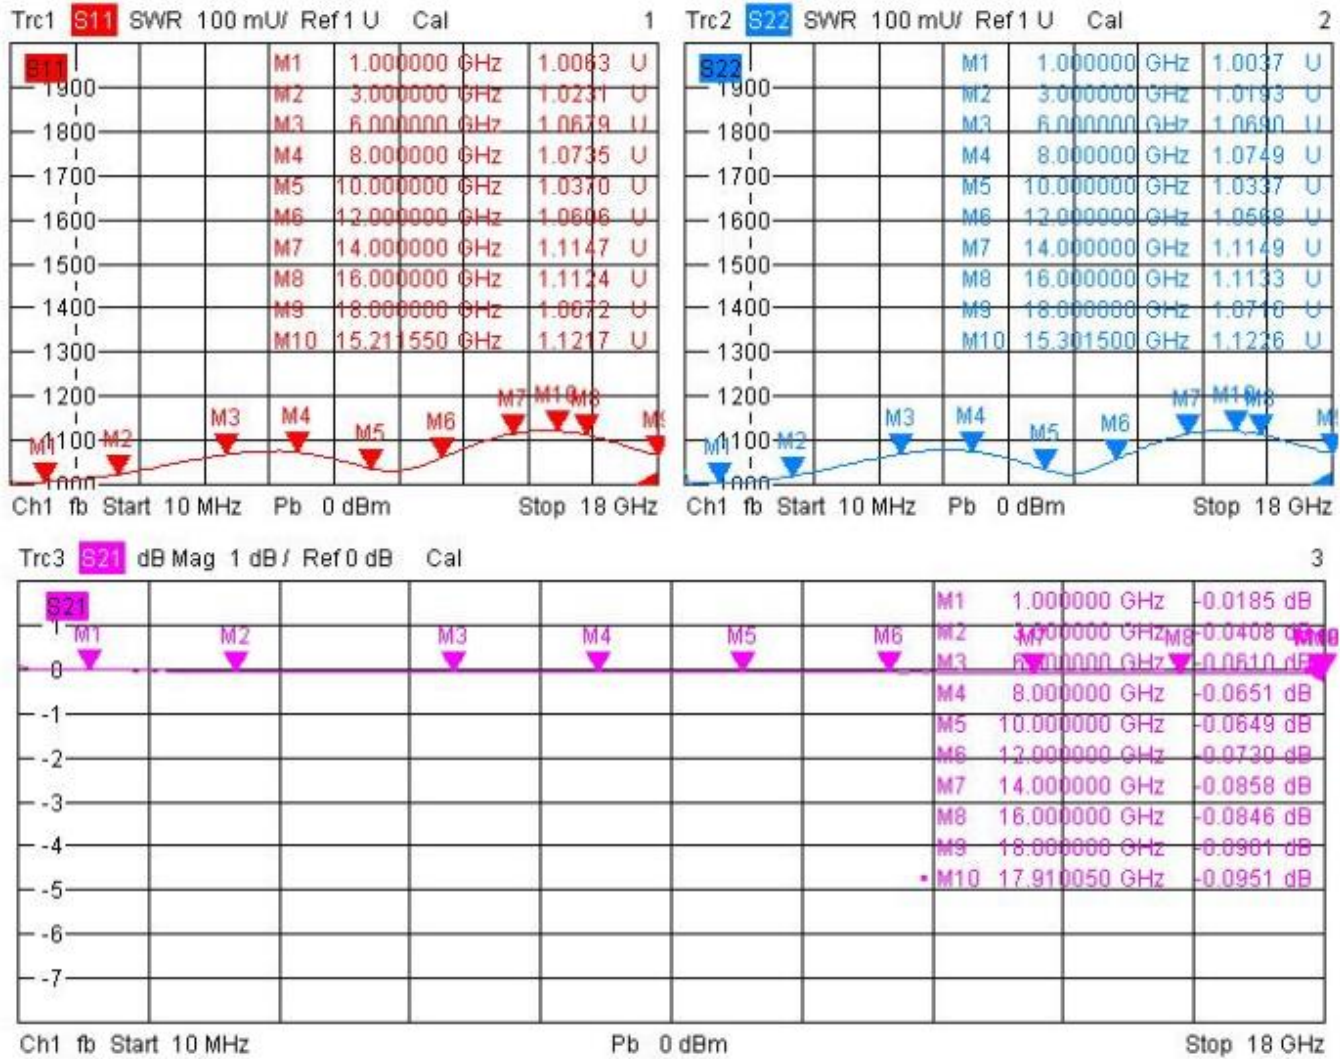

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)