
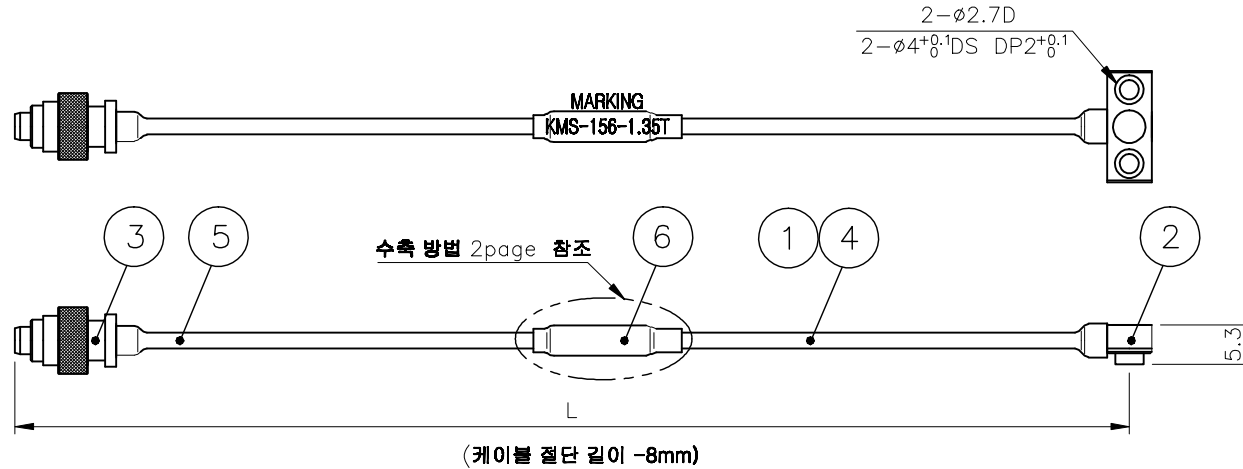


* CABLE LOT별 지름 치수 확인 후 작업할 것.

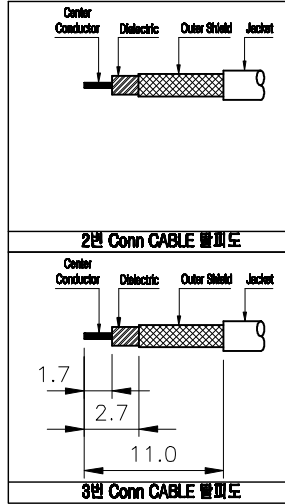

※중요※

1. 절단 길이 동일하게 작업 필요
2. 주파수대역 DC ~ 5GHz

MARKER(MHz)	Insertion Loss(S21)
700	-0.20±0.08
1400	-0.35±0.08
2300	-0.58±0.08
3000	-0.68±0.08
4000	-0.84±0.15
5000	-0.78±0.15
VSWR(S11)	2.1 (Max)

*측정방법

1. SMA E cal을 사용하여 Cal 할 것.
2. Test Cable
Port 1 - SMBL Conn 체결
Port 2 - KMS-156 Adaptor(AD00573-7/1) 체결 후 측정

KMS-156-1.35T
MARKING

6	MARKING TUBE	1	LS TUBE	ATU00212-N/1	ø4 - WHITE
5	BONDING TUBE	1	LS TUBE	ATU00003-N/1	ø3 BLACK 70mm
4	BONDING TUBE	1	LS TUBE	ATU00003-N/1	ø3 BLACK 80mm
3	CONNECTOR	1	KJ COMTECH	CN03921-7/1	KMS156-PL 2H
2	CONNECTOR	1	KJ COMTECH	CN03489-7/3	SMBL50-PS
1	COAXIAL CABLE		유신전자	ACA00468-N/1	RF-ø1.37 (실제 케이블 길이 145)

Notes

1. RoHS & Pb-FREE
2. CONNECTOR FINISHES
 - 2-1. SMBL50 PS-----▶▶BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating
 - 2-2. KMS156 PL-2H-----▶▶BODY : Nickel Plating
CONTACT : Gold Plating

CUSTOMER	NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	REMARKS
CUSTOMER CODE	DATE	2020. 04. 04.				
CABLE LENGTH TOLERANCE	APPROVED BY					
0 ~ 1000mm : +5, -0	CHECKED BY					
1000 ~ 2000mm : +10, -0	DRAWN BY	I.C.KIM				
2000 ~ 3000mm : +15, -0	CHECKED BY					
3000 ~ 4000mm : +20, -0	SCALE	N/S	UNIT	mm		
4000 ~ 5000mm : +25, -0						
5000 ~ : +10%						



RF & MICROWAVE
TECHNOLOGY
Tel : 02-02-047-0015
Fax : 02-02-047-0017

TITLE
CABLE ASS'Y

DWG NO.	CF01489-7/1
DETAIL NO.	
REVISION	IR
SHEET	1 of 1