


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	I.C.KIM	I.C.KIM	2013.05.14.

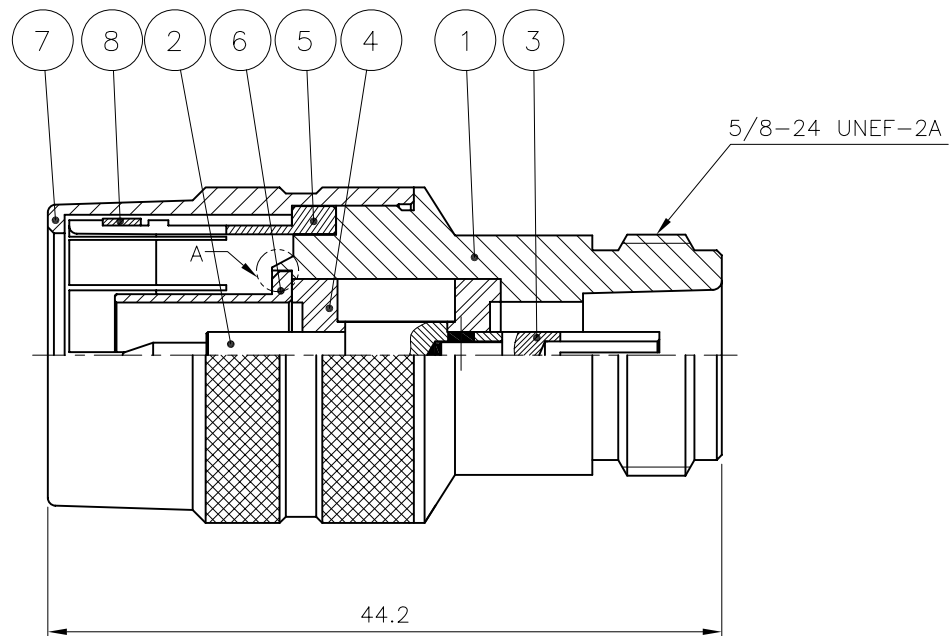

주 기
1. A부 가시미 작업 할 것

*전기적 특성

1	Frequency range	DC~6GHz	
2	Impedance	50 ohm Nominal	
3	V.S.W.R	1.2 : 1 Max @ 6GHz	
4	Insertion Loss	0.2dB (Min)	
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA	5차 : -160dBc max
		WCDMA	3차 : -150dBc max

8	SPRING RING	1	MBsBD	Nickel Plate	DSR00023-5/1
7	CAP	1	MBsBD	SUCO Plate	DCU00058-5/1
6	JACK	1	MBsBD	SUCO Plate	DJA00044-5/2
5	JACK	1	MBsBD	SUCO Plate	DJA00054-5/1
4	INSULATOR	2	TEFLON		DIN00699-N/1
3	CONTACT	1	BeCu	Silver Plate	DCT00689-5/3
2	CONTACT	1	MBsBD	Silver Plate	DCT00779-5/2
1	BODY	1	MBsBD	SUCO Plate	DBD00916-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2013. 05. 14.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	_____	CHECKED BY	E.H.KIM	TITLE N50 (J) N50 (P) ST PUSH-ON ADAPTOR
		DRAWN BY	I.C.KIM	
FINISH	_____	SCALE 5/1	UNIT mm	DWG NO. AD00139-7/3 REVISION I R SHEET 1 of 1

A4