


REVISION

No.	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2021. 08. 17.


(1) GUIDE COVER는 CABLE ASSY 특성 확인 후 조립할 것
- 조립 JIG : DEQ01205-1/1+DEQ01206-1/1

(2) GUIDE COVER 조립 후 뚜껑 COVER 뒷면에 레이저마킹 할 것
- 레이저 마킹JIG : 조립 JIG와 동일 JIG 사용

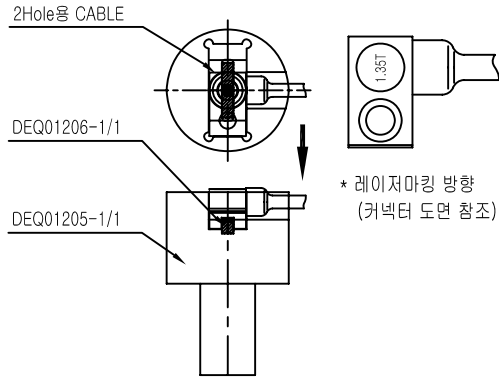

*플랜지 2H 좌측커팅

* CABLE LOT별 지름 치수 확인 후 작업할 것.

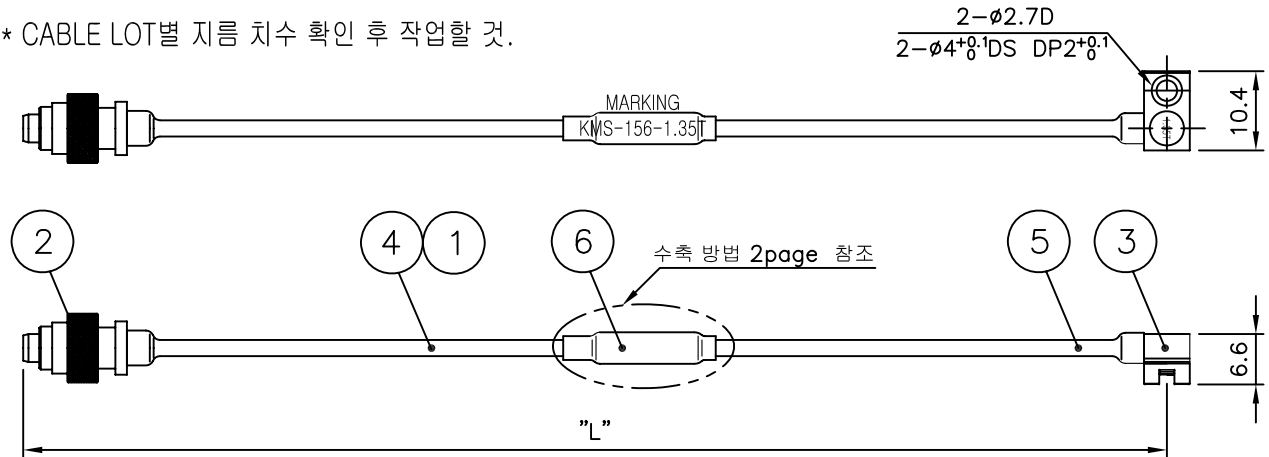

(케이블 절단 길이 "L-8mm")


*측정방법

1. SMA E cal을 사용하여 Cal 할 것.

2. Test Cable

Port 1 - SMBL Conn 체결

Port 2 - KMS-156 Adaptor(AD00555-7/1) 체결 후 측정



※중요※

1. 절단 길이 동일하게 작업 필요

2. 주파수대역 DC ~ 5GHz

MARKER(MHz)	Insertion Loss(S21)
700	-0.20±0.08
1400	-0.35±0.08
2300	-0.58±0.08
3000	-0.68±0.08
4000	-0.84±0.15
5000	-0.78±0.15
VSWR(S11)	2.1 (Max)

KMS-156-1.35T
MARKING

Notes

1. RoHS & Pb-FREE

2. CONNECTOR FINISHES

2-1. SMBL50 PS-----▶▶BODY : Nickel Plating
CONTACT : Gold Plating
CAP : Nickel Plating

2-2. KMS156 JL-2H-----▶▶BODY : Nickel Plating
CONTACT : Gold Plating

6	MARKING TUBE	1	LS TUBE	ATU00212-N/1	φ4 - WHITE
5	BONDING TUBE	1	LS TUBE	ATU00003-N/1	φ3 BLACK 70mm
4	BONDING TUBE	1	LS TUBE	ATU00003-N/1	φ3 BLACK 80mm
3	CONNECTOR	1	KJ COMTECH	CN03404-7/9	KMS156-JL 2H
2	CONNECTOR	1	KJ COMTECH	CN03489-7/3	SMBL50-PS
1	COAXIAL CABLE		유신전자	ACA00468-N/1	RF-φ1.37 (실제 케이블 길이 L-8mm)
NO.	DESCRIPTION	Q'TY	VENDER	PART NO.	RAMARKS

DATE		2021. 08. 17.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
APPROVED BY		I.C.KIM			
CHECKED BY				TITLE	
DRAWN BY		S.Y.EUN		CABLE ASS'Y	
CHECKED BY				DWG NO.	
SCALE		UNIT		CF01568-7/2	
N/S		mm		DETAIL NO.	
				REVISION	
				SHEET	
				1 of 1	

CUSTOMER	
CUSTOMER CODE	
CABLE LENGTH TOLERANCE	
0 ~ 1000mm : +5, -0	
1000 ~ 2000mm : +10, -0	
2000 ~ 3000mm : +15, -0	
3000 ~ 4000mm : +20, -0	
4000 ~ 5000mm : +25, -0	
5000 ~	+10%

※ 작업 형상

*품번 4를 먼저 수축한 뒤에 그위로 품번5를 겹치도록 수축한다.
겹친부분을 품번6 으로 덮으면서 수축 한다.

