



ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~8GHz
3. VSWR (Max) : 1.2
4. Insertion Loss (Min) : -0.2dB

REVISION

REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration			2002.09.06.
↑	플랜지 사각 원형소재 변경 및 내부 구조 개선	S.Y.EUN	I.C.KIM	2021.01.21.

2-5/8-24 UNEF-2A

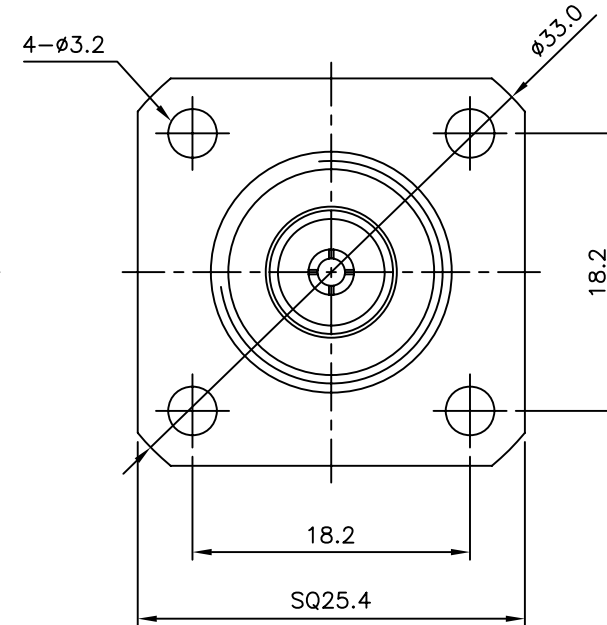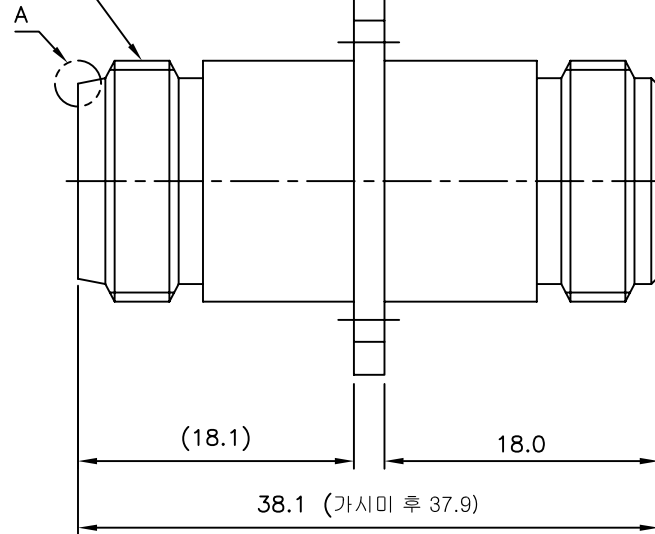

* 주 기
1. A 부분 가시미 작업 할 것.

5	PIN 고정링	1	MBsBD	Gold Plate	DSR00048-5/1
4	INSULATOR	2	TEFLON		DIN00699-N/1
3	CONTACT	1	BeCu C17300	Gold Plate	DCT00621-5/2
2	INSERT BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD03818-5/1
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DBD00800-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017						
	±0.1	2021. 01. 21.									
	Angle	APPROVED BY	I.C.KIM			TITLE					
	±1°	CHECKED BY									
MATERIAL		DRAWN BY			S.Y.EUN			N50 (J) N50 (J) 4 HOLE			
-											
FINISH		SCALE	UNIT			A4		DWG NO.		AD00140-7/1	
-		2/1	mm					REVISION		1	SHEET