


AD00140-7/1

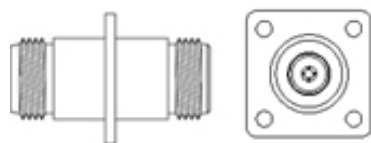

N (J) N (J) 4 HOLE

□ 25.4-18.2-3.2

L:38.1mm(18.1-1.9-18.1)

BO/NI,PI/GO

AD00140-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR,SWR,dB)

■ _1.0GHz - 1.04, 1.04, 0.01
■ _2.0GHz - 1.05, 1.05, 0.00
■ _3.0GHz - 1.02, 1.01, 0.00
■ _4.0GHz - 1.11, 1.11, 0.03
■ _5.0GHz - 1.16, 1.16, 0.00
■ _6.0GHz - 1.11, 1.11, 0.00
■ _7.0GHz - 1.09, 1.04, 0.16
■ _8.0GHz - 1.17, 1.13, 0.16

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

■ N Male to N Male

□ ZVA50 (~50GHz)

10GHz Cable (CF00539-7/1)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

