


REVISION						
REV	DESCRIPTION			DRAWN	APPR	DATE
IR	Initial Registration			H.J.LEE	I.C.KIM	2015. 04. 03.

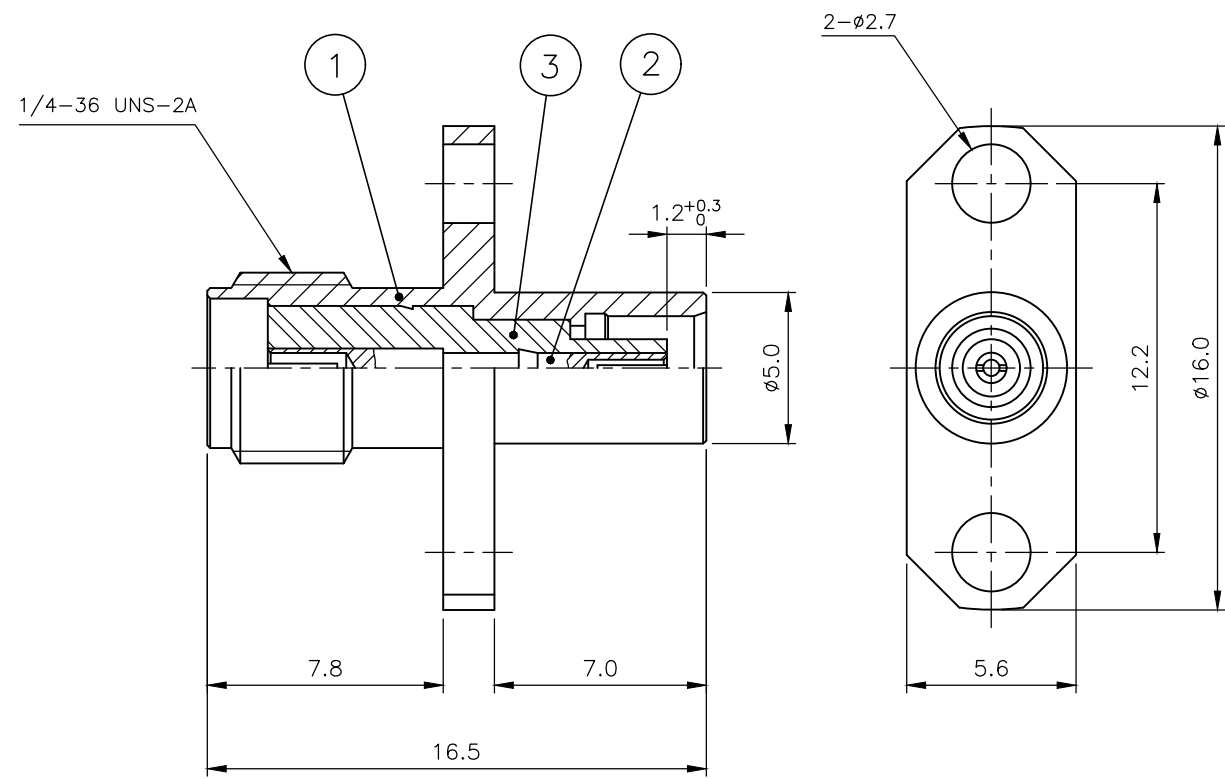

Electrical Data	Detail
Impedance	50 Ω
Frequency Range	0 to 6 GHz
Insulation Resistance	> 1000 MΩ
Voltage Rating	500 V RMS
Contact Resistance	Center:5.0 mΩ Max Outer:2.5 mΩ Max
VSWR	1.20 Max
Environmental Data	Detail
Temperature Range	-55°C to +155°C
Environmental Compliance	ROHS

3	INSULATOR	1	TEFLON		DAI00001-N/2
2	CONTACT	1	BeCu C17300	Gold Plate	DAC00001-5/2
1	BODY	1	MBsBD C3604BD-F	Gold Plate	DAD00001-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2015. 03. 17.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY I.C.KIM					
MATERIAL _____	CHECKED BY			TITLE MCX50(J) SMA50(J) JS-2H			
	DRAWN BY H.J.LEE						
FINISH _____	SCALE 4/1	UNIT mm		A4	DWG NO. AD00156-7/3		
					REVISION I R	SHEET 1 of 1	