


AD00162-7/2

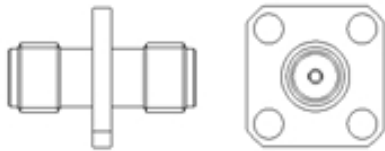

AD00162-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR,SWR,dB)

■_1GHz	- 1.00, 1.01, 0.01
■_3GHz	- 1.03, 1.04, 0.04
■_6GHz	- 1.06, 1.08, 0.06
■_8GHz	- 1.05, 1.04, 0.07
■10GHz	- 1.01, 1.04, 0.08
■12GHz	- 1.08, 1.13, 0.09
■14GHz	- 1.14, 1.17, 0.11
■16GHz	- 1.12, 1.13, 0.11
■18GHz	- 1.04, 1.05, 0.11
■MaX__-	- 1.14, 1.17, 0.13

▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor

- ☐ E5071B (~8.5GHz)
- ☒ ZVA50 (~50GHz)
- ☒ 2.4mm Male to 2.4mm Male
- 50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

