



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	S.H.KIM	2023.02.27.

1/4-36 UNS-2A

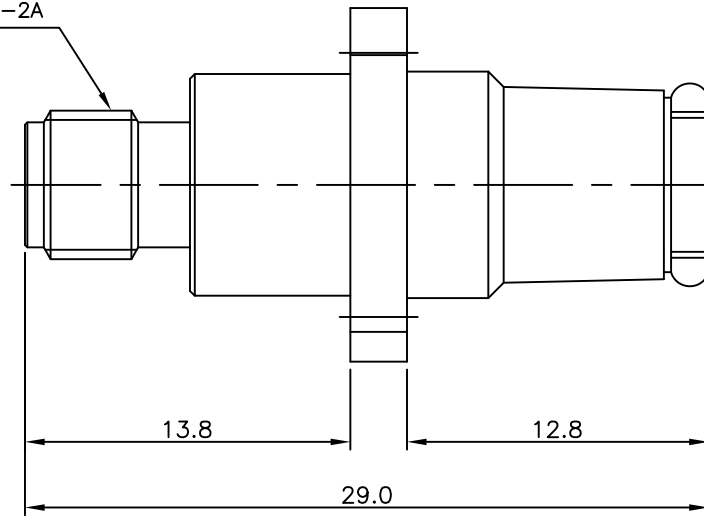


4-M2.3x0.4P THRU

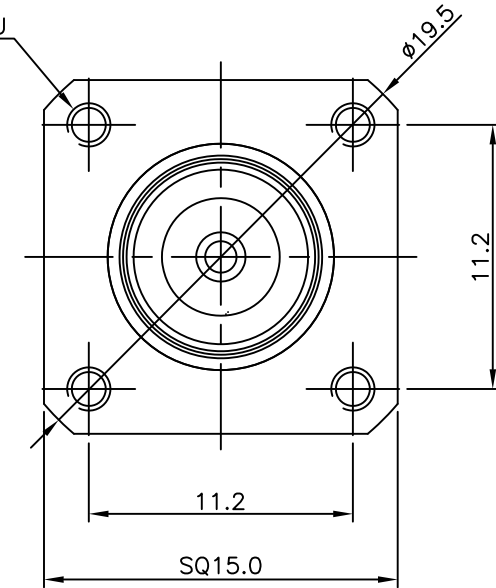

* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY : DC~6GHz
3. VSWR : 1.2(Max)
4. INSERTION LOSS : -0.2dB(Min)

5	JACK	1	BeCu C17300	Nickel Plate	DJA00039-5/1
4	INSULATOR	1	TEFLON		DIN01960-N/4
3	INSULATOR	1	TEFLON		DIN00108-N/1
2	CONTACT	1	MBsBD C3604BD-F	Gold Plate	DAC00229-5/3
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00463-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 02. 27.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017	
	Angle ±1°	APPROVED BY	S.H.KIM		
MATERIAL		CHECKED BY		TITLE SMA50 (J) TRU50 (P) 4 HOLE ADAPTOR	
FINISH		DRAWN BY	S.Y.EUN		
		SCALE	3/1	UNIT	mm
					A4
				DWG NO.	AD00163-7/3
				REVISION	I R
				SHEET	1 of 1