



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.H.KIM		2023.06.15.

1/4-36 UNS-2A

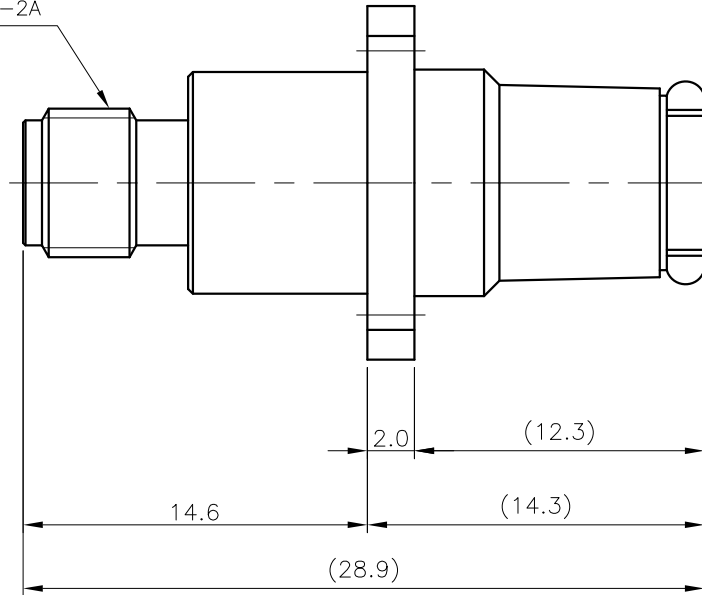

4-M2.3x0.4P THRU

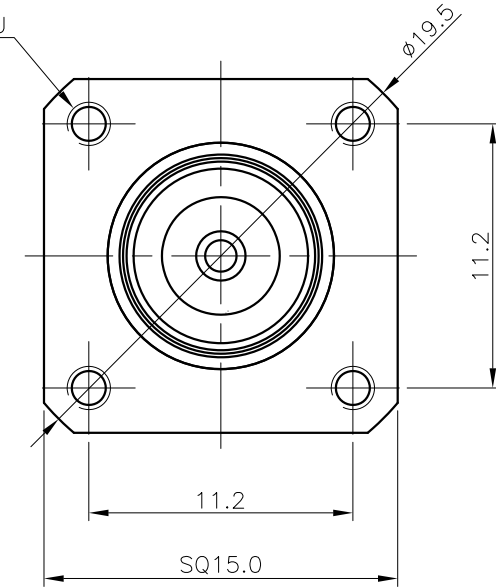

* ELECTRICAL DATA

1. IMPEDANCE : 50ohm
2. FREQUENCY : DC~4GHz
3. VSWR : 1.2(Max)
4. INSERTION LOSS : -0.2dB(Min)

5	JACK	1	BeCu C17300	Nickel Plate	DJA00039-5/1
4	INSULATOR	1	TEFLON		DIN01960-N/4
3	INSULATOR	1	TEFLON		DIN02834-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC00229-5/4
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00463-5/2
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2023. 06. 15.			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017		
	Angle ±1°	APPROVED BY					
MATERIAL -		CHECKED BY			TITLE SMA50 (J) TRU50 (P) 4 HOLE ADAPTOR		
		DRAWN BY S.H.KIM					
FINISH -		SCALE 3/1	UNIT mm		A4	DWG NO. AD00163-7/4	
REVISION						I R	SHEET 1 of 1