

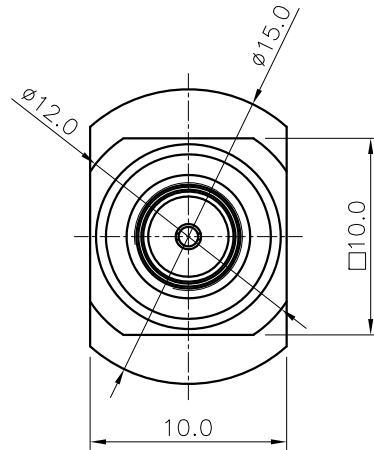



REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	S.Y.EUN	I.C.KIM	2020.09.22.

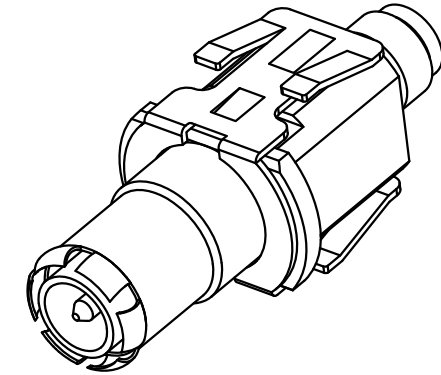


1/4-36 UNS-2A

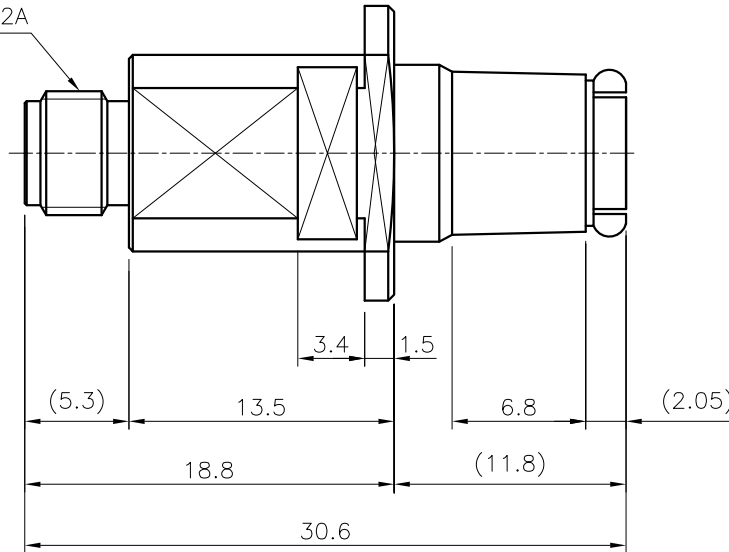

* PCB 두께 권장 사양 : 3.2t ±0.1mm



Installation

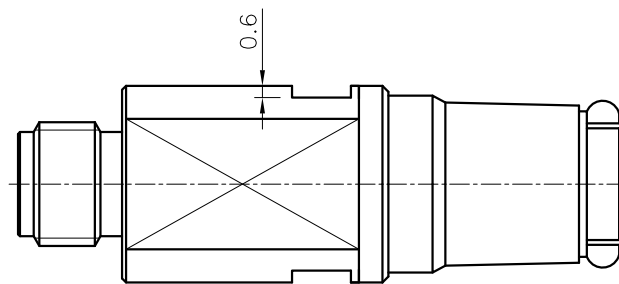

VIEW A

VIEW A

6	LOCK PANEL	1	SUS	Passivated	DSR00070-N/2
5	JACK	1	BeCu C17300	Nickel Plate	DJA00039-5/1
4	INSULATOR	1	TEFLON		DIN01960-N/1
3	INSULATOR	1	TEFLON		DIN00108-N/1
2	CONTACT	1	BeCu C17300	Gold Plate	DAC00229-5/2
1	BODY	1	MBsBD C3604BD-F	Nickel Plate	DAD00084-5/3
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.2	DATE 2020. 09. 22.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017			
	Angle ±1°	APPROVED BY I.C.KIM					
MATERIAL _____		CHECKED BY	TITLE SMA50 (J) TRU50 (P) ADAPTOR				
		DRAWN BY S.Y.EUN					
FINISH _____		SCALE 2.5/1	UNIT mm		A4	DWG NO. AD00165-7/4	
						REVISION	I R