


AD00166-7/2

M2.3

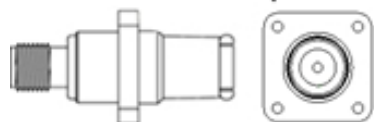

SMA (J) TRU (P) 4 HOLE

□15-11.2-M2.3

L:26.9mm(13.1-2.6-11.7)

BO/NI,PI/GO

AD00166-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR,SWR,dB)

■_1.0GHz	- 1.13, 1.11, 0.02
■_2.0GHz	- 1.12, 1.11, 0.00
■_3.0GHz	- 1.11, 1.13, 0.01
■_4.0GHz	- 1.14, 1.15, 0.00

■_5.0GHz	- 1.27, 1.27, 0.08
■_6.0GHz	- 1.45, 1.44, 0.20
■_7.0GHz	- 1.64, 1.64, 0.30
■_8.0GHz	- 1.58, 1.62, 0.21

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

