
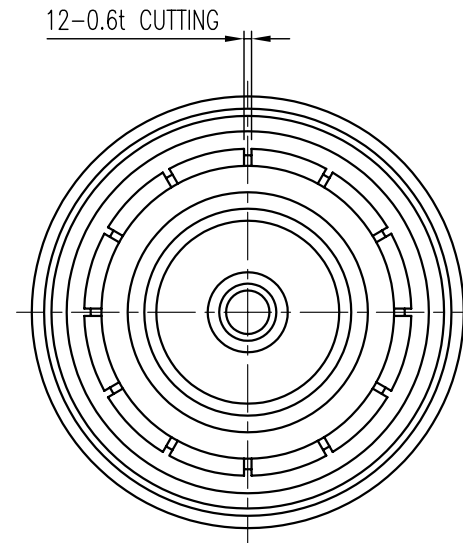


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration			2004.06.11.
1	[설번처리No.201107-0002] 절연체 내경 치수 변경하여 코드 Rev	I.C.KIM	J.H.YOUN	2011.07.06.

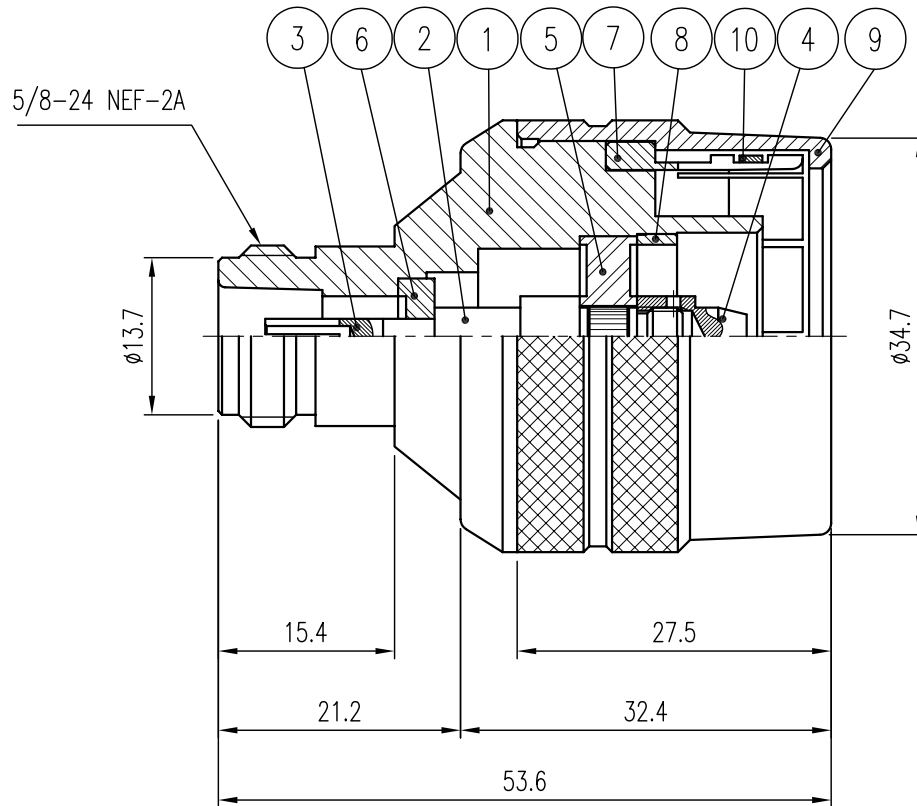

ELECTRICAL SPEC.

1. Impedance : 50 Ω (Nominal)
2. Frequency Range : DC ~ 3 GHz
3. V.S.W.R : 1.2 : 1 (MAX)
4. Insertion Loss : -0.2dB (MAX)

10	SPRING RING	1	Beryllium copper	SUCO Plated	DSR00022-5/1 (R5005)
9	CAP	1	BRASS	SUCO Plated	DCU00077-5/1 (K5017)
8	INSERT BODY	1	BRASS	SUCO Plated	DSR00067-5/1 (M5009)
7	JACK	1	BRASS	SUCO Plated	DJA00062-5/1 (J5013)
6	INSULATOR	1	PTFE		DIN00678-N/1 (HA203)
5	INSULATOR	1	PTFE		DIN01932-N/1 DIN00942-N/1 (H5086)
4	CONTACT	1	BRASS	Silver Plated (5 μ m)	DCT00871-5/1 (E5117)
3	CONTACT	1	Beryllium copper	Silver Plated (5 μ m)	DCT00690-5/1 (E8268)
2	CONTACT	1	BRASS	Silver Plated (7 μ m)	DCT00844-5/1 (EA225)
1	BODY	1	BRASS	SUCO Plated (3 μ m)	DAD00068-5/1 (DA252)
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2004. 06. 11.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	J.H.YOUN	
MATERIAL		CHECKED BY	K.I.CHO	KJ COMTECH CO.,LTD. TITLE DIN(M)-N(F) PUSH ON
		DRAWN BY	I.C.KIM	
FINISH		SCALE	4/1	A4 DWG NO. AD00180-7/1 REVISION 1 SHEET 1 of 1
		UNIT	mm	