


AD00195-7/2

AD00195-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.01, 1.01, 0.02
■_3GHz	- 1.00, 1.01, 0.05
■_6GHz	- 1.07, 1.07, 0.09
■_8GHz	- 1.04, 1.04, 0.10
■10GHz	- 1.10, 1.08, 0.13
■12GHz	- 1.15, 1.14, 0.14
■14GHz	- 1.09, 1.06, 0.15
■16GHz	- 1.14, 1.13, 0.16
■18GHz	- 1.16, 1.16, 0.17
■MaX_	- 1.18, 1.17, 0.26

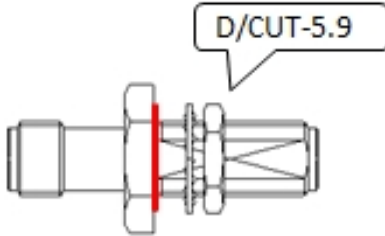

SMA (J) SMA (J) BH
L:26.6mm(10-2.5-14.1)
BO/GO, PI/GO

- NETWORK ANALYZER ► Test cable ► Test Adaptor
- E5071B (~8.5GHz) ■ 2.4mm Male to 2.4mm Male
■ ZVA50 (~50GHz) 50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

