


AD00218-7/1

PIN 0.53Φ

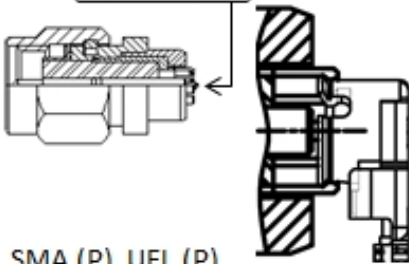

SMA (P) UFL (P)

ST L:15.5mm (UFL외부 메이팅)

BO/GO, PI/GO, CAP/NI

AD00218-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■ _1.0GHz - 1.06, 1.07, 0.18
■ _2.0GHz - 1.15, 1.15, 0.20
■ _3.0GHz - 1.15, 1.17, 0.18
■ _4.0GHz - 1.13, 1.14, 0.18
■ _5.0GHz - 1.07, 1.08, 0.16
■ _6.0GHz - 1.07, 1.10, 0.09
■ _7.0GHz - 1.14, 1.16, 0.07

■ _8.0GHz - 1.25, 1.23, 0.05


▶ NETWORK ANALYZER ▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

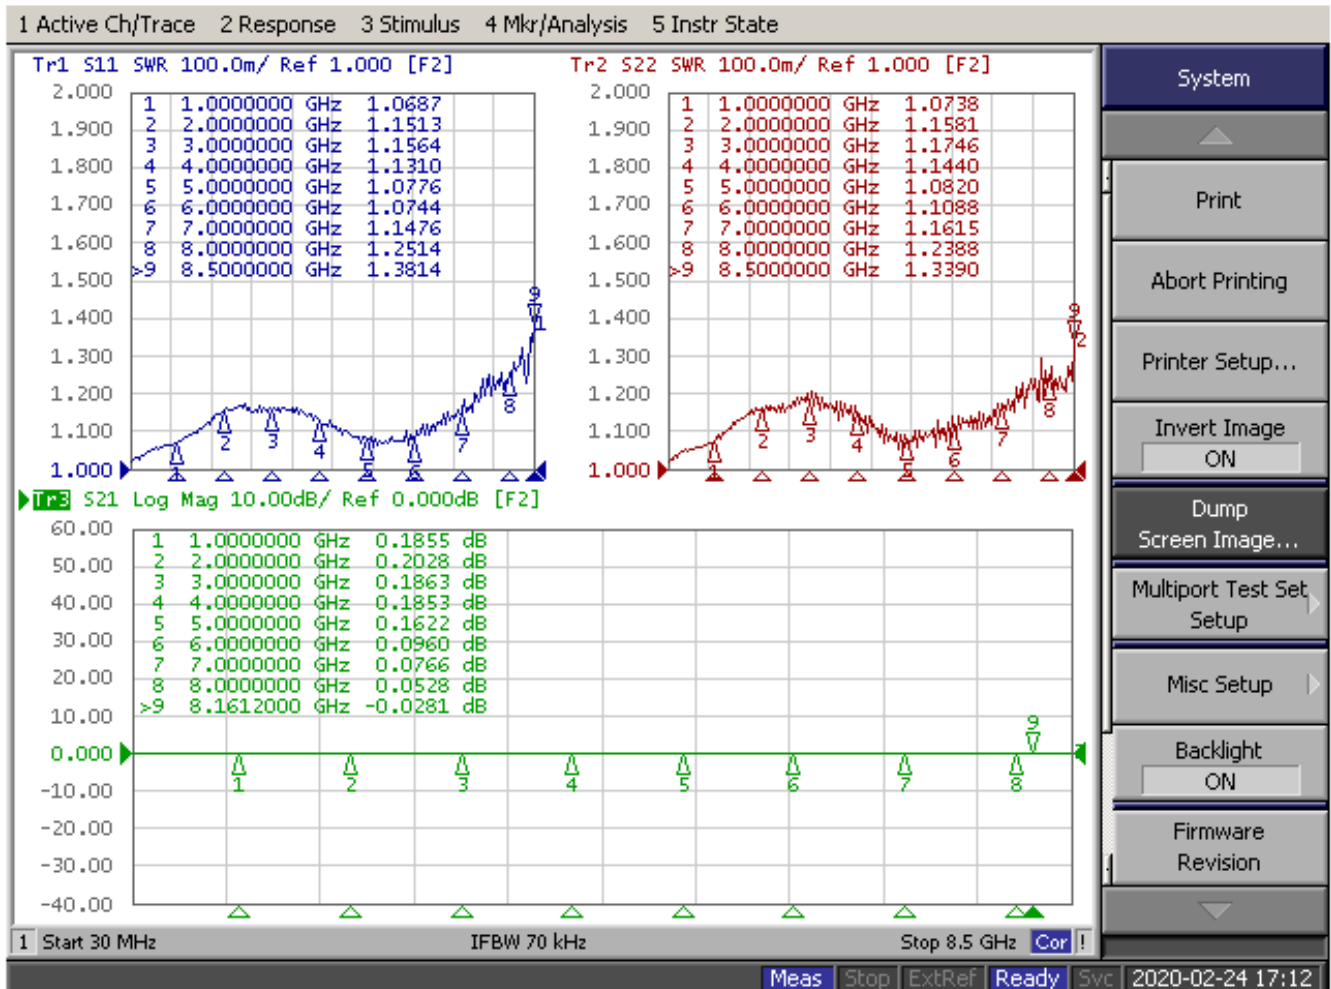

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multipoint Test Set Setup

Misc Setup

Backlight

ON

Firmware

Revision