


AD00238-7/2

D/CUT-5.9

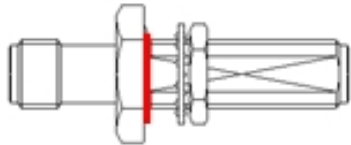

SMA (J) SMA (J) BH
L:31.6mm(10-2.5-19.1)
BO/GO, PI/GO

AD00238-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1GHz	- 1.00, 1.01, 0.01
■_3GHz	- 1.02, 1.02, 0.03
■_6GHz	- 1.04, 1.03, 0.05
■_8GHz	- 1.08, 1.09, 0.06
■10GHz	- 1.10, 1.11, 0.07
■12GHz	- 1.02, 1.02, 0.07
■14GHz	- 1.17, 1.16, 0.11
■16GHz	- 1.13, 1.13, 0.10
■18GHz	- 1.10, 1.10, 0.11
■MaX___	- 1.18, 1.18, 0.12

► NETWORK ANALYZER ► Test cable ► Test Adaptor

- ☐ E5071B (~8.5GHz) ☒ 2.4mm Male to 2.4mm Male
☒ ZVA50 (~50GHz) 50GHz Cable

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

