

AD00250-7/1



UHF (J) UHF (J)
ST L:41mm
BO/NI, PI/GO

AD00250-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

- _1.0GHz - 1.87, 1.79, 0.79
- _2.0GHz -
- _3.0GHz -
- _4.0GHz -
- _5.0GHz -
- _6.0GHz -
- _7.0GHz -
- _8.0GHz -

► NETWORK ANALYZER

► Test cable


► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

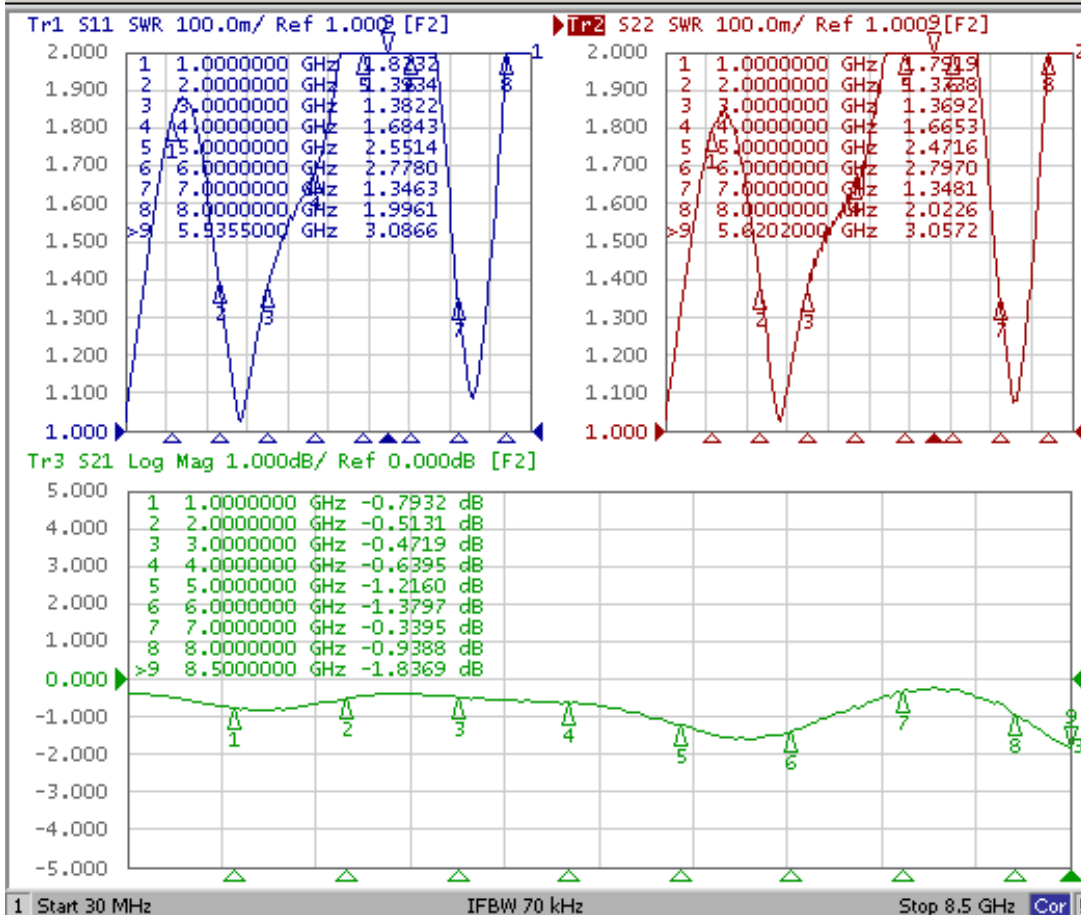

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multipoint Test Set Setup

Misc Setup

Backlight

ON

Firmware Revision

Meas Stop ExtRef Ready Svc 2020-04-17 16:55