

AD00259-7/1

AD00259-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.11, 1.11, 0.05
■_2.0GHz	- 1.12, 1.11, 0.11
■_3.0GHz	- 1.07, 1.07, 0.13
■_4.0GHz	- 1.11, 1.04, 0.26
■_5.0GHz	- 1.31, 1.23, 0.31
■_6.0GHz	- 1.35, 1.29, 0.26
■_7.0GHz	- 1.30, 1.29, 0.23
■_8.0GHz	- 1.41, 1.38, 0.30



BNC (J) SMA (J) BH
L:33.5mm(22.2-3-8.3)
BO/NI, PI/GO

► NETWORK ANALYZER

► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)



■ N Male to SMA Male

■ BNC (P) SMA (J) ST

□ ZVA50 (~50GHz)

10GHz Cable (CF00540-7/1)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

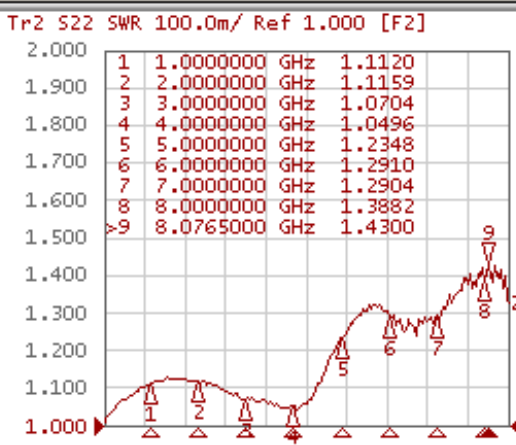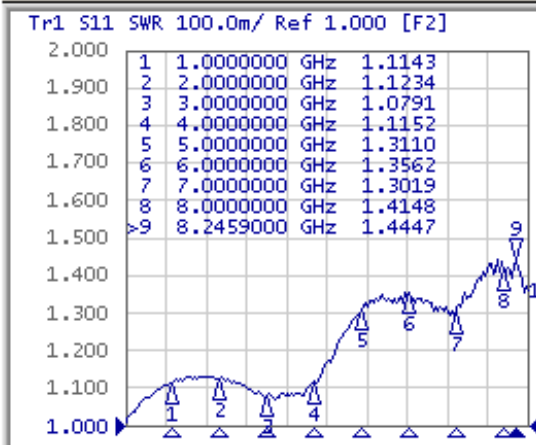

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 30 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas Stop ExtRef Ready Svc 1988-01-01 08:33

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multiport Test Set Setup

Misc Setup

Backlight

ON

Firmware Revision

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)