


AD00278-7/2



MCX (J) N (P)
ST L:30.6mm
BO/NI, PI/GO, CAP/NI

AD00278-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.03, 1.03, 0.02
■_2.0GHz	- 1.14, 1.15, 0.09

■_3.0GHz	- 1.21, 1.23, 0.15
■_4.0GHz	- 1.21, 1.24, 0.11
■_5.0GHz	- 1.29, 1.30, 0.16
■_6.0GHz	- 1.23, 1.26, 0.17
■_7.0GHz	- 1.07, 1.09, 0.12
■_8.0GHz	- 1.08, 1.05, 0.10


► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

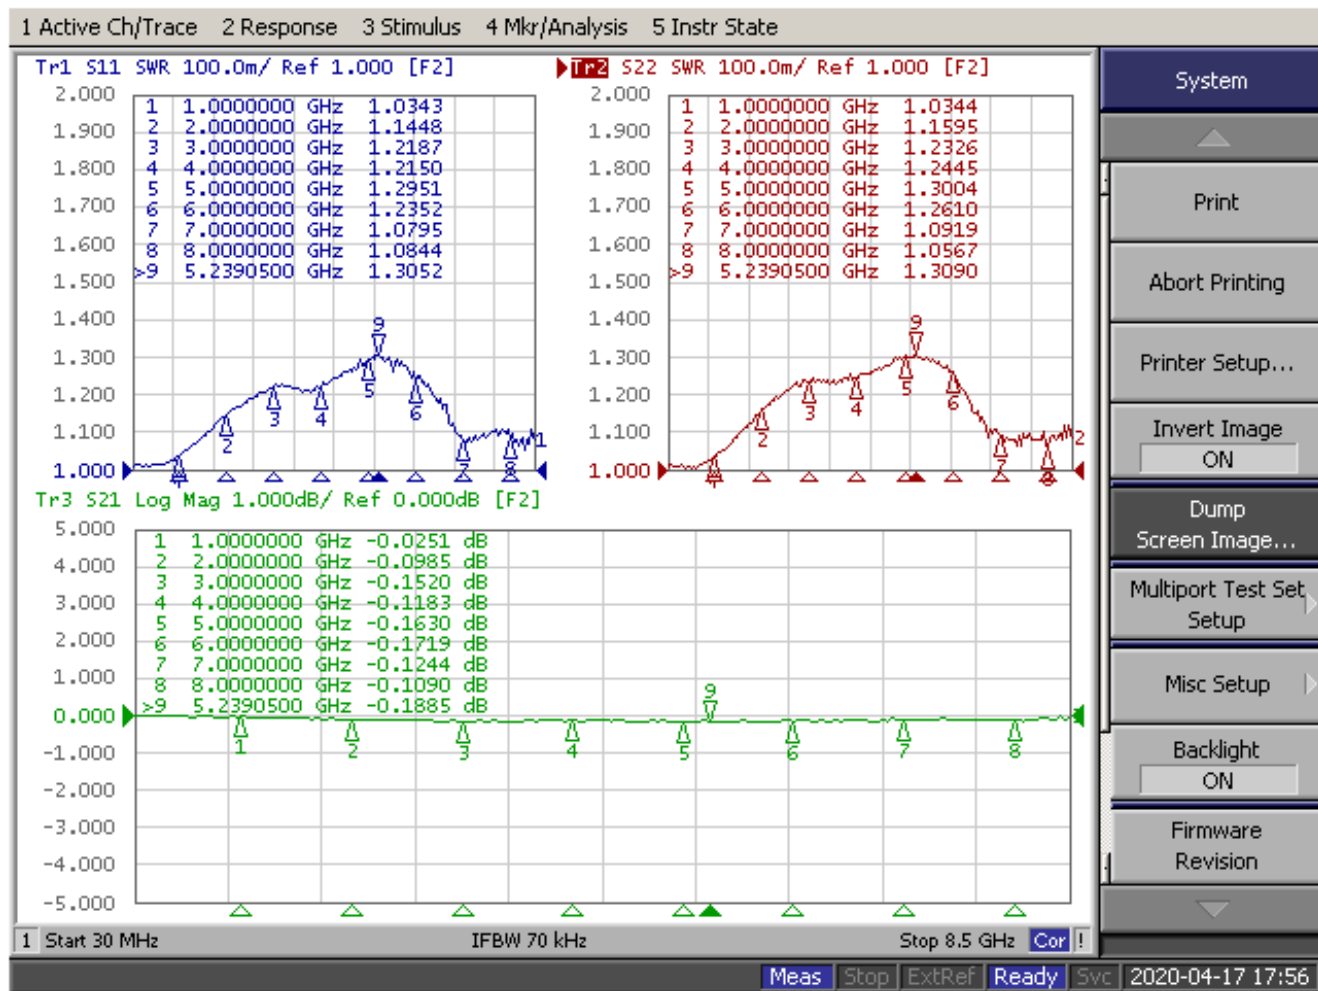

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump
Screen Image...

Multipoint Test Set
Setup

Misc Setup

Backlight

ON

Firmware

Revision