


SPRING/RING-O

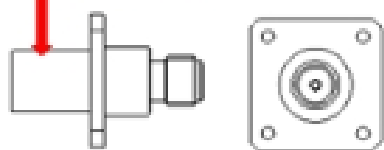

PDM (P) SMA (J)

4 HOLE □17.5-12.7-M2.6

L:25.5mm(10.6-1.8-13.1)

■MM:5.9mm

BODY/Nickel PIN/Gold

AD00292-7/5	
Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21 (SWR, SWR, dB)			
■_1.0GHz	-	1.04, 1.04, 0.04	
■_2.0GHz	-	1.01, 1.01, 0.08	
■_3.0GHz	-	1.01, 1.02, 0.11	
■_4.0GHz	-	1.06, 1.04, 0.12	
■_5.0GHz	-	1.09, 1.07, 0.16	
■_6.0GHz	-	1.08, 1.05, 0.14	
■_7.0GHz	-	1.15, 1.14, 0.17	
■_8.0GHz	-	1.16, 1.17, 0.16	


- ▶ NETWORK ANALYZER ▶ Test cable ▶ Test Adaptor
- ☐ E5071B (~8.5GHz)

☐ ZVA50 (~50GHz)


☒ ZND (~8.5GHz)
- N Male to SMA Male

10GHz Cable (CF00540-7/1)
- AD00534-7/3

AD00292-7/5

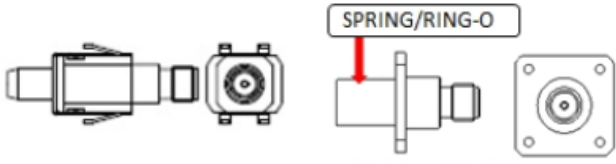

7/17/2020 5:37:33 AM
1328.5170K92-102136-V/a

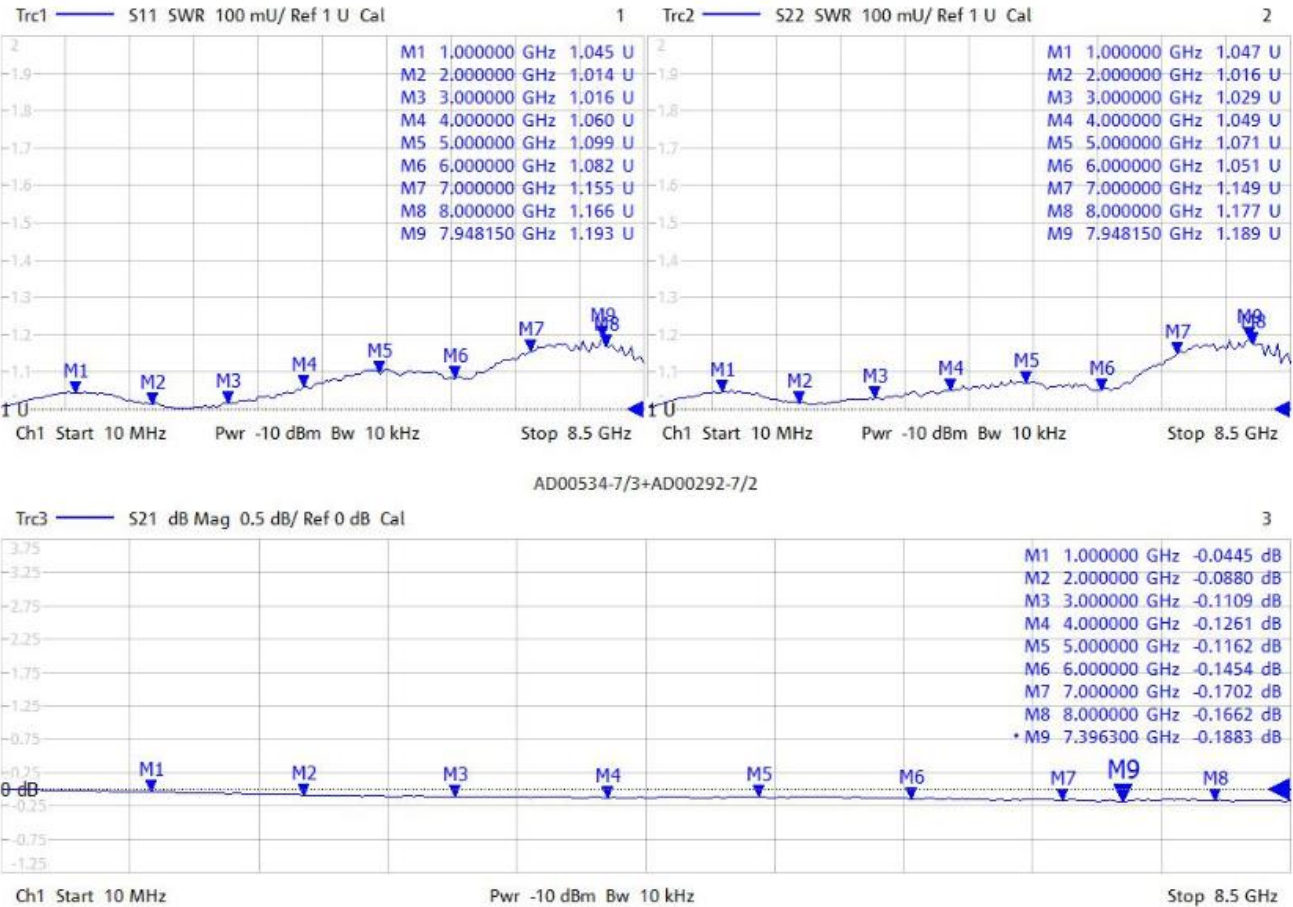

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)