


AD00295-7/2

SPRING/RING-O



PDM (P) SMA (J)

4 HOLE □12.7-8.64-M2.3

L:26.1mm(13.6-1.8-10.7)

■MM:7.2mm

BODY/Nickel PIN/Gold

AD00295-7/2

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz - 1.06, 1.05, 0.08
■_2.0GHz - 1.06, 1.07, 0.10
■_3.0GHz - 1.04, 1.05, 0.11
■_4.0GHz - 1.02, 1.03, 0.10
■_5.0GHz - 1.07, 1.07, 0.13
■_6.0GHz - 1.11, 1.13, 0.15
■_7.0GHz - 1.05, 1.07, 0.16
■_8.0GHz - 1.06, 1.07, 0.13

► NETWORK ANALYZER

► Test cable

► Test Adaptor


■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)


TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

1 Active Ch/Trace 2 Response 3 Stimulus 4 Mkr/Analysis 5 Instr State

Tr1 S11 SWR 100.0m/ Ref 1.000 [F2]

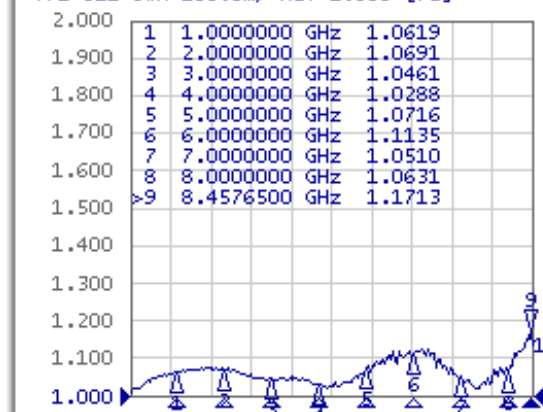

Tr2 S22 SWR 100.0m/ Ref 1.000 [F2]

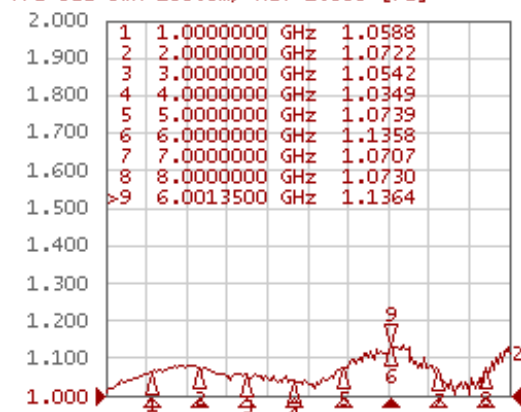

Tr3 S21 Log Mag 1.000dB/ Ref 0.000dB [F2]



1 Start 30 MHz

IFBW 70 kHz

Stop 8.5 GHz

Meas

Stop

ExtRef

Ready

Svc

2020-02-14 16:44

System

Print

Abort Printing

Printer Setup...

Invert Image

ON

Dump Screen Image...

Multipoint Test Set Setup

Misc Setup

Backlight

ON

Firmware

Revision