
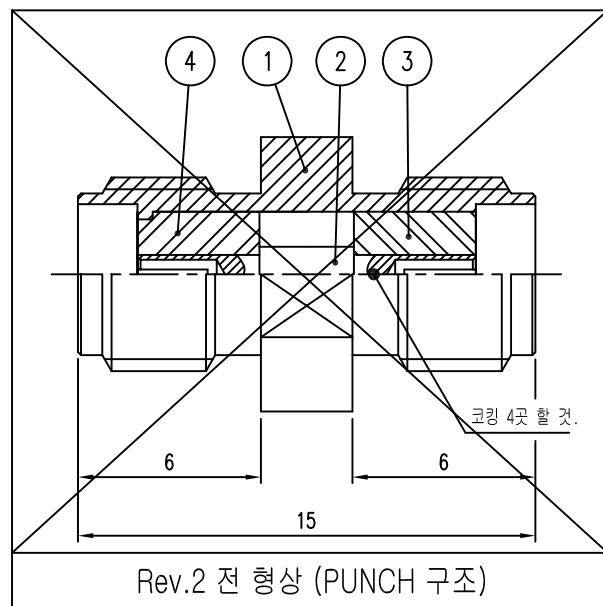


1. IMPEDANCE : 50Ω NOMINAL
2. FREQUENCY RANGE : DC ~ 6GHz
3. V.S.W.R : 1.15 : 1 (Max)
4. Insertion Loss : -0.2dB (Min)

REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
1R	Initial Registration			1994.07.04.
1	신뢰성 향상(설비No.연구2006-188) (특성 개선-내부 형상 변경)	김은희	윤상진	2006.09.25.
2	PUNCH -> HOOK 구조 변경	은선영	김민철	2020.12.29.

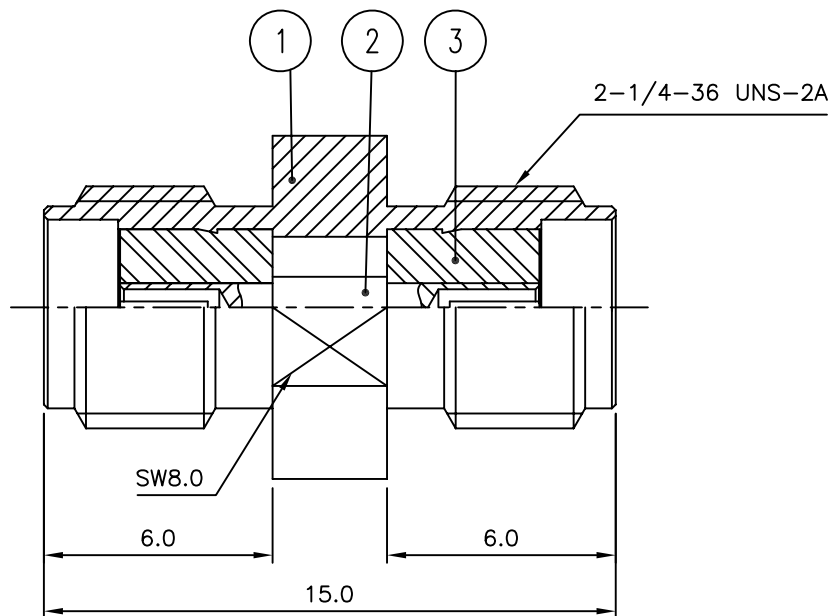

	4	INSULATOR	1	TEFLON		DIN00206 N/1
	3	INSULATOR	2 =	TEFLON		DIN02552-N/1 DIN00194 N/1
	2	CONTACT	1	BeCu C17300	Gold Plate	DCT00089-5/3 DCT00089-5/1
	1	BODY	1	MBSBD C3604BD-F	Gold Plate	DBD00103-5/2 DBD00103-5/2
	NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE			 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8013			
	±0.2	2020. 12. 29.						
	Angle	APPROVED BY	I.C.KIM					
MATERIAL	±1°	CHECKED BY	TITLE					

	_____	DRAWN BY	S.Y.EUN					
FINISH	_____	SCALE	UNIT	A4				
	_____	5/1	mm					
	_____			DWG NO. AD00296-7/1				
				REVISION		2	SHEET	1 of 1