


AD00304-7/1

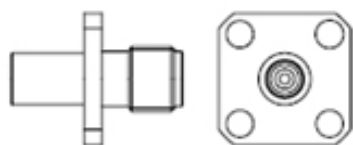

MCX (J) SMA (J) 4 HOLE

□12.7-8.64-2.7

L:16.5mm(7-1.7-7.8)

BO/GO, PI/GO

AD00304-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40℃ ~ 125℃

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.07, 1.07, 0.19
■_2.0GHz	- 1.11, 1.11, 0.07
■_3.0GHz	- 1.12, 1.13, 0.00
■_4.0GHz	- 1.14, 1.13, 0.04
■_5.0GHz	- 1.14, 1.14, 0.11
■_6.0GHz	- 1.11, 1.11, 0.12
■_7.0GHz	- 1.10, 1.13, 0.13
■_8.0GHz	- 1.13, 1.13, 0.06

► NETWORK ANALYZER ► Test cable

► Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1: IN PORT VSWR(S11), TR2: OUT PORT VSWR(S22), TR3: Insertion Loss (S21)

