


AD00336-7/1

PIN 0.43Φ

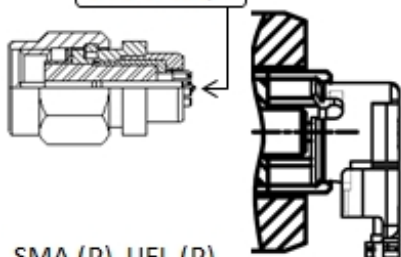

SMA (P) UFL (P)

ST L:15.5mm (UFL외부 메이팅)

BO/GO, PI/GO, CAP/NI

AD00336-7/1

Frequency	
Insertion Loss	
VSWR	
Impedance	■ 50Ω □ 75Ω
Temperature	-40°C ~ 125°C

S11/S22/S21(SWR, SWR, dB)

■_1.0GHz	- 1.05, 1.06, 0.18
■_2.0GHz	- 1.13, 1.14, 0.21
■_3.0GHz	- 1.16, 1.17, 0.19
■_4.0GHz	- 1.16, 1.17, 0.19
■_5.0GHz	- 1.14, 1.14, 0.16
■_6.0GHz	- 1.11, 1.15, 0.09
■_7.0GHz	- 1.08, 1.10, 0.01

■_8.0GHz	- 1.47, 1.32, 1.36

▶ NETWORK ANALYZER

▶ Test cable

▶ Test Adaptor

■ E5071B (~8.5GHz)

□ ZVA50 (~50GHz)

TR1 : IN PORT VSWR(S11), TR2 : OUT PORT VSWR(S22), TR3 : Insertion Loss (S21)

