


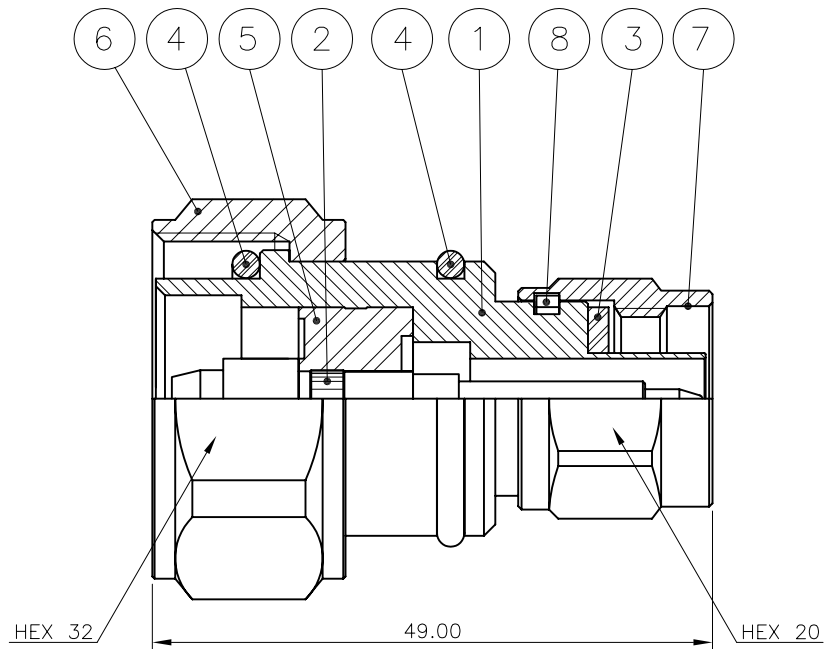

REVISION		
REV	DESCRIPTION	DATE
IR	Initial Registration	2009. 11. 03.

★ 전기적 특성

1	Frequency range	DC ~ 6GHz	
2	Impedance	50Ω NOMINAL	
3	V.S.W.R	1.1: 1 max @ 3GHz 1.2 : 1 max @ 6GHz	
4	Insertion Loss	-0.2dB min	
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA	5차 : -160dBc max
		WCDMA	3차 : -150dBc max

8	SPRING RING	1	MBsBD	Nickel Plate	DSR00020-5/1 (R8001)
7	COUPLING CAP	1	MBsBD	SUCO Plate	DCU00063-5/1 (K8015)
6	COUPLING CAP	1	MBsBD	SUCO Plate	DCU00078-5/1 (K5015)
5	INSULATOR	1	TEFLON		DIN01680-N/1
4	GASKET	2	SILICONE RUB		DGK00054-N/1 (G5006)
3	GASKET	1	SILICONE RUB		DGK00013-N/1 (G8001)
2	CONTACT	1	MBsBD	Silver(7μm)	DAC00191-5/1
1	BODY	1	MBsBD	SUCO(6μm)	DAD00194-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal ±0.1	DATE 2009. 11. 03.		 KJ COMTECH CO.,LTD. RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle ±1°	APPROVED BY	J.H.YOUN	
MATERIAL	-	CHECKED BY	E.H.KIM	TITLE 7/6 DIN(M)-N50(M) 일체형
		DRAWN BY	D.W.KANG	
FINISH	-	SCALE	UNIT	A4 DWG NO. AD00374-7/2 REVISION I R SHEET 1 of 1
		1.5/1	mm	