


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	D.W.KANG	J.H.YOUN	2009.11.17
1	[설번No.201904-0001] PIN 이탈 개선으로 인한 핀 변경	S.Y.EUN	I.C.KIM	2019.04.03.

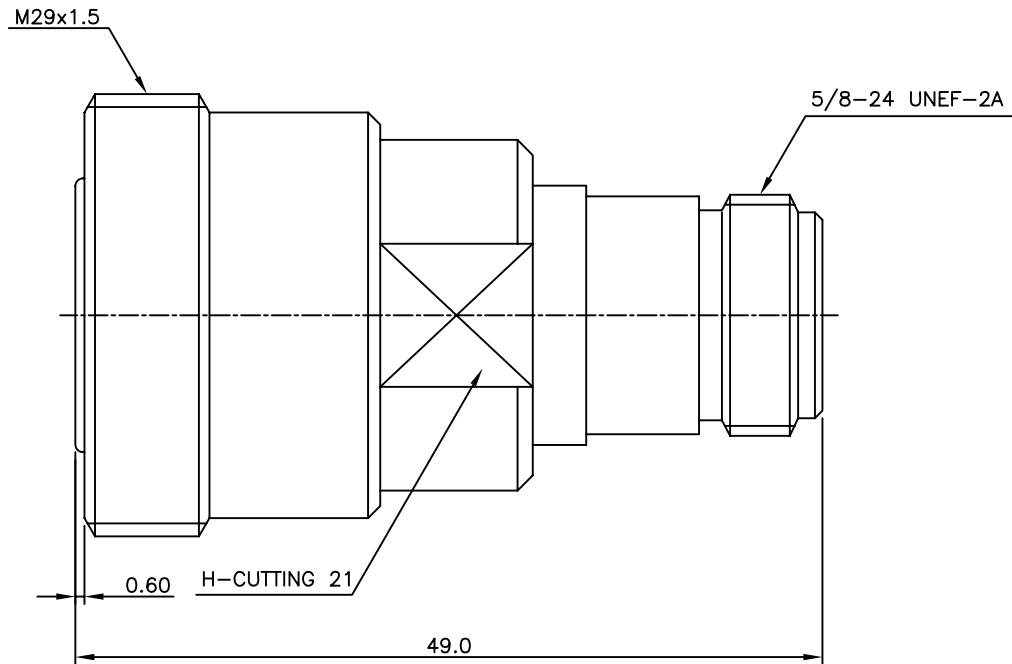

* 전기적 특성

1	Frequency range	DC ~ 6GHz	
2	Impedance	50Ω NOMINAL	
3	V.S.W.R	1.2 : 1 max	
4	Insertion Loss	-0.2dB min	
5	PIMD-DIN TERM (-43dBm / 2 tone)	CDMA	5차 : -160dBc max
		WCDMA	3차 : -150dBc max

5	SPRING RING	1	BeCu	Silver(7μm)	DSR01054-5/2
4	INSULATOR	1	TEFLON		DIN01680-N/1
3	CONTACT	1	BeCu	Silver(7μm)	DCT01575-5/1
2	CONTACT	1	MBsBD	Silver(7μm)	DCT02152-5/2 DCT02152-5/1
1	BODY	1	MBsBD	SUCO(6μm)	DAD00196-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2019. 04. 03.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	I.C.KIM	
MATERIAL	-	CHECKED BY		TITLE 7/16 DIN(F)-N50(F) 일체형
		DRAWN BY	S.Y.EUN	
FINISH	-	SCALE	2/1	DWG NO. AD00376-7/2 REVISION 1 SHEET 1 of 1
		UNIT	mm	

