


REVISION				
REV	DESCRIPTION	DRAWN	APPR	DATE
IR	Initial Registration	D.W.KANG	J.H.YOUN	2009.11.17.
↑	[설번처리No.201011-0003] 부적합 개선 - PIN 낙시바늘+널링 변경	I.C.KIM	Y.H.CHOI	2010.11.04.

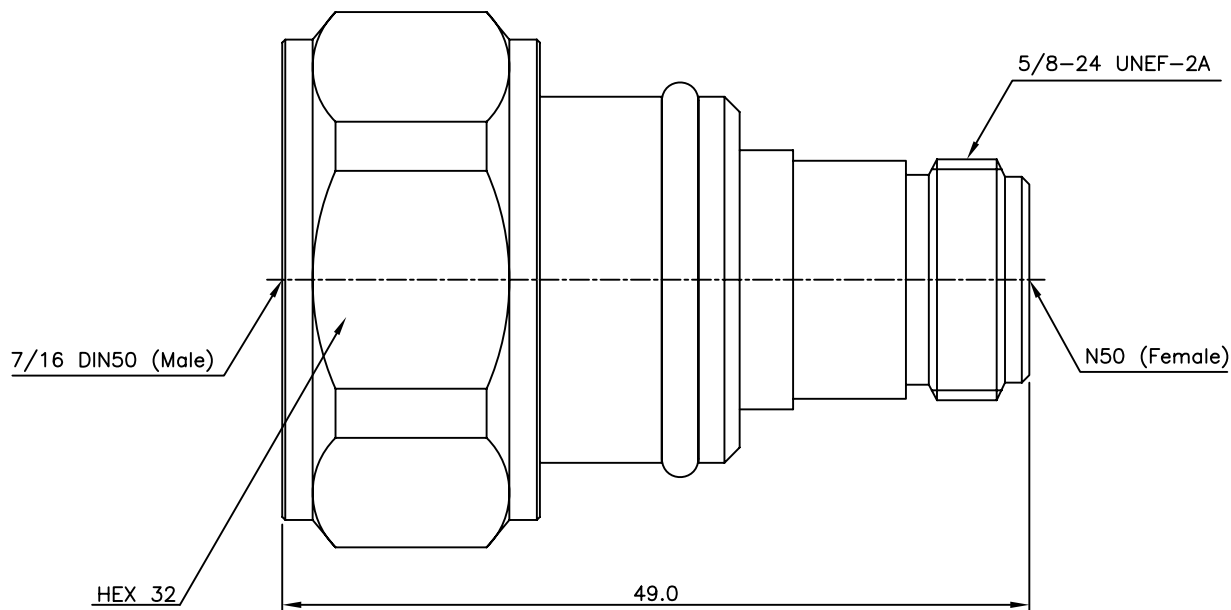

ENVIRONMENTAL DATA :

1. TEMPERATURE RANGE : -40°C ~ +85°C

ELECTRICAL DATA :

1. IMPEDANCE : 50ohm
2. FREQUENCY RANGE : DC~6GHz
3. VSWR (Max) : 1.2
4. INSERTION LOSS : 0.2dB (Max)
5. PIMD (-43dBm / 2tone) 3rd Order IMD : -160dBc (Min)

6	COUPLING CAP	1	MBsBD	Nickel Plate	DCU00078-5/2 (K5015)
5	INSULATOR	1	TEFLON		DIN01680-N/1
4	GASKET	2	SILICONE RUB		DGK00054-N/1 (G5006)
3	CONTACT	1	BeCu	Silver(7μm)	DCT01575-5/1
2	CONTACT	1	MBsBD	Silver(7μm)	DAC00217-5/1 DCT02151-5/1
1	BODY	1	MBsBD	SUCO(6μm)	DAD00197-5/1
NO.	DESCRIPTION	Q'TY	MATERIAL	PLATING	CODE

TOLERANCE	Decimal	DATE 2010. 11. 04.		 RF & MICROWAVE TECHNOLOGY Tel : 82-32-347-8015 Fax : 82-32-347-8017
	Angle	APPROVED BY	Y.H.CHOI	
MATERIAL	-	CHECKED BY		KJ COMTECH CO.,LTD. TITLE 7/16 DIN(M)-N50(F) 일체형
		DRAWN BY	I.C.KIM	
FINISH	-	SCALE	2/1	A4 DWG NO. AD00377-7/2 REVISION 1 SHEET 1 of 1
		UNIT	mm	